



United States Department of the Interior **RECEIVED**

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

FEB 22 2002

DIVISION OF
OIL, GAS AND MINING

In Reply Refer To:

3106

UTU-25566 et al

(UT-924)

FEB 21 2002

NOTICE

Westport Oil and Gas Company L.P. : Oil and Gas
410 Seventeenth Street, #2300 :
Denver Colorado 80215-7093 :

Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Westport Oil and Gas Company, Inc. into Westport Oil and Gas Company, L.P. with Westport Oil and Gas Company, L.P. being the surviving entity.


For our purposes, the name change is recognized effective December 31, 2001.

The oil and gas lease files identified have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Westport Oil and Gas Company, Inc. to Westport Oil and Gas Company, L.P.. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Colorado.

UTU-03405
UTU-20895
UTU-25566
UTU-43156
UTU-49518
UTU-49519
UTU-49522
UTU-49523



Robert Lopez
Chief, Branch of
Minerals Adjudication

cc: Moab Field Office
Vernal Field Office
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217
State of Utah, DOGM, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114
Teresa Thompson (UT-922)
Joe Incardine (UT-921)

001

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT ☐
(highlight changes)

APPLICATION FOR PERMIT TO DRILL			5. MINERAL LEASE NO: ML-47044	6. SURFACE: Indian
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>			7. IF INDIAN, ALLOTTEE OR TRIBE NAME: Ute	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>			8. UNIT or CA AGREEMENT NAME:	
2. NAME OF OPERATOR: El Paso Production Oil & Gas Company			9. WELL NAME and NUMBER: Bayless State 2-2	
3. ADDRESS OF OPERATOR: P.O. Box 1148 CITY Vernal STATE UT ZIP 84078			10. FIELD AND POOL, OR WILDCAT: Natural Buttes	
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 2460' FSL & 1937' FEL 4435549Y 40.06400 6N773X -109.63077 AT PROPOSED PRODUCING ZONE:			11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWSE 2 9S 20E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 7.25 Miles Northeast of Ouray, UT			12. COUNTY: Uintah	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 1937	16. NUMBER OF ACRES IN LEASE: 280		17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) Refer to Topo C	19. PROPOSED DEPTH: 7,950		20. BOND DESCRIPTION: 400JU0705	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 4667.9' GL	22. APPROXIMATE DATE WORK WILL START:		23. ESTIMATED DURATION: 10 Days	

24. PROPOSED CASING AND CEMENTING PROGRAM					
SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT			SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT
12 1/4"	9 5/8"	M-50	36#	250	110 sx Class G
7 7/8"	4 1/2"	J-55	11.6#	7,950	540 sx Prem Lite II
					840 sx 50/50 POZ/G


RECEIVED

FEB 24 2003

DIV. OF OIL, GAS & MINING

CONFIDENTIAL

25. ATTACHMENTS	
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:	
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER	<input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER


NAME (PLEASE PRINT) Cheryl Cameron	TITLE Operations
SIGNATURE 	DATE 2/17/2003

(This space for State use only)

API NUMBER ASSIGNED:

43-047-34904

APPROVAL:

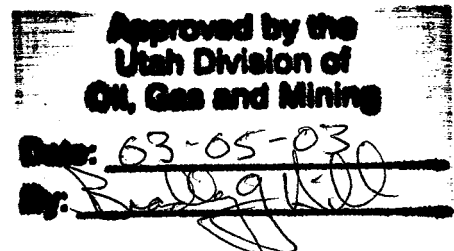



United States Department of the Interior

BUREAU OF INDIAN AFFAIRS

Washington, D.C. 20240

FEB 10 2003

IN REPLY REFER TO:
Real Estate Services

Carroll A. Wilson
Principal Landman
Westport Oil and Gas Company, L.P.
1368 South 1200 East
Vernal, Utah 84078

Dear Mr. Wilson:

This is in response to your request for approval of RLI Insurance Company's Nationwide Oil and Gas Lease Bond No. RLB0005239 executed effective December 17, 2002, (\$150,000 coverage) with Westport Oil and Gas Company, L. P., as principal.

This bond is hereby approved as of the date of this correspondence and will be retained in the Bureau of Indian Affairs' Division of Real Estate Services, 1849 C Street, NW, MS-4512-MIB, Washington, D.C. 20240. All Bureau oil and gas regional offices and the surety are being informed of this action.

In cases where you have existing individual and/or collective bonds on file with one or more of our regional offices, you may now request those offices, directly, to terminate in lieu of coverage under this Nationwide Bond.

Enclosed is a copy of the approved bond for your files. If we may be of further assistance in this matter, please advise.

Sincerely,

Director, Office of Trust Responsibilities

ACTING

Enclosure

**BAYLESS STATE 2-2
NWSE Sec. 2, T9S, R2E
Uintah County, UT
ML-47044**

**EL PASO PRODUCTION COMPANY
DRILLING PROGRAM**

1. Estimated Tops of Important Geologic Markers:

<u>Formation</u>	<u>Depth</u>
KB	4685'
Green River	1850'
Wasatch	5450'
Total Depth	7950'

2. Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
	KB	4685'
	Green River	1850'
Gas	Wasatch	
Water	N/A	
Other Minerals	N/A	

3. Pressure Control Equipment (Schematic Attached)

The BOP stack will consist of one 11" 3,000 psi annular BOP, one 11" 3,000 psi double ram, and one 11' drilling spool. The lower ram will contain pipe rams, and the upper ram will contain blind rams.

The choke and kill lines and the choke manifold will have a 3,000 psi minimum pressure rating.

The hydrill will be tested to 1,500 psi. The rams, choke manifold, kelly safety valves, drill string safety valves, and inside BOP will be tested to 3,000 psi.

4. **Proposed Casing Program:**

Refer to the attached Casing and Cementing Program.

The proposed casing and cementing program shall be conducted as approved to protect and/or isolate all usable water zones potentially productive zones, lost circulation zones, abnormally pressured zones, and any prospectively valuable deposits of minerals. Any isolating medium other than cement shall receive approval prior to use. The casing setting depth shall be calculated to position the casing seat opposite a competent formation that will contain the maximum pressure to which it will be exposed during normal drilling operations. Determination of casing setting depth shall be based on all relevant factors, including: presence/absence of hydrocarbons, fracture gradients, usable water zones, formation pressures, lost circulation zones, other minerals, or other unusual characteristics.

All casing, except conductor casing, shall be new or reconditioned and tested. Used casing shall meet or exceed API standards for new casing.

The surface casing shall be cemented back to surface either during the primary cement job or by remedial cementing. If drive pipe is used, it may be left in place if its total length is less than twenty feet below the surface. If the total length of the drive pipe is equal to or greater than twenty feet, it will be pulled prior to cementing surface casing, or it will be cemented in place.

As a minimum, usable water zones shall be isolated and/or protected by having a cement top for the production casing at least 200 feet above the base of the usable water. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint.

Top plugs shall be used to reduce contamination of cement by displacement fluid. A bottom plug or other acceptable technique, such as a suitable preflush fluid, inner string cement method, etc., shall be utilized to help isolate the cement from contamination by the mud being displaced ahead of the cement slurry.

Maximum anticipated bottom hole pressure calculated @ 7950 TD approximately equals 3180 psi (calculated at 0.4 psi/foot).

Maximum anticipated surface pressure equals approximately 1431 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

All casing strings below the conductor shall be pressure tested to 0.22 psi/foot of casing string length or to 1500 psi, whichever is greater, but not to exceed 70% of the minimum internal yield. If pressure declines more than 10% in 30 minutes, corrective action shall be taken.

Casing design is subject to revision based on geologic conditions encountered.

Proposed Cementing Program:

Refer to the attached Cementing Program.

For production casing, actual cement volumes will be determined from the calculated hole volume + 60% excess, minimum. Cement volumes will include an amount sufficient to circulate to surface, if possible. Operator will continue to attempt to circulate cement to surface, but at a minimum, circulation will be 200' above the top of the Green River Formation, or as directed by the Authorized Officer (AO) or Acting, or as specified in the Conditions of Approval (COA) in the Application for Permit to Drill (APD).

For surface casing, waiting on cement time will be adequate to achieve 500 psi compressive strength at the casing shoe prior to drilling out.

Anticipated cement tops will be reported as to depth, not the expected number of sacks of cement to be used. The Division of Oil, Gas, and Mining (DOGM) Office shall be notified, with sufficient lead time, in order to have a DOGM representative on location while running all casing strings and cementing.

After cementing the surface pipe and/or any intermediate strings, but before commencing any test, The casing string shall stand cemented until the cement has reached a compressive strength of at least 500 psi at the shoe. WOC time shall be recorded in the Driller's Log.

Auxiliary Well Control Equipment to Be Used:

Kelly Cock

A sub with a full opening (TIW) valve having threads compatible with drill string tubulars.

5. Drilling Fluids Program:

Refer to the attached Drilling Program.

No chromate additives will be used in the mud system prior to approval to ensure adequate protection of fresh water aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well.

6. Evaluation Program:

Refer to the attached Logging Program.

The Evaluation Program may change at the discretion of the well site geologist with approval by The Authorized Officer.

Cased Hole Logs Only

GR/Dipole Sonic/Neutron:

TD-500' above the Wasatch Formation
(to surface at times)

Drill Stem Tests:

As deemed necessary

Cores:

As deemed necessary

When cement has not been circulated to surface, the cement top will be determined by Either a temperature survey or cement bond log. Should a temperature survey fail to Locate the cement top, a cement bond log shall be run.

7. **Abnormal Conditions:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth.

8. **Variances:**

Operator requests approval to perform drilling operations without an automatic igniter because drilling will be performed with an air/mist medium.

9. **Other Information:**

All loading lines will be placed inside the berm surrounding the tank battery.

10. **Anticipated Starting Dates & Notification of Operations:**


Anticipated commencement date shall be upon approval of the proposed APD.

Drilling Days: Approximately 10 days

Completion Days: Approximately 7 days

DRILLING PROGRAM FOR APD

COMPANY NAME El Paso Production Company DATE February 17, 2003
WELL NAME BAYLESS STATE 2-2 TD 7,950' MD/TVD
FIELD Natural Buttes COUNTY Uintah STATE Utah ELEVATION 4,668' KB
SURFACE LOCATION 2460' FSL, 1937' FEL, NW/SE, SEC. 2, T9S, R20E BHL Straight Hole
OBJECTIVE ZONE(S) Green River, Wasatch
ADDITIONAL INFO Regulatory Agencies: BLM, BIA, UDOGM, Tri-County Health Dept.

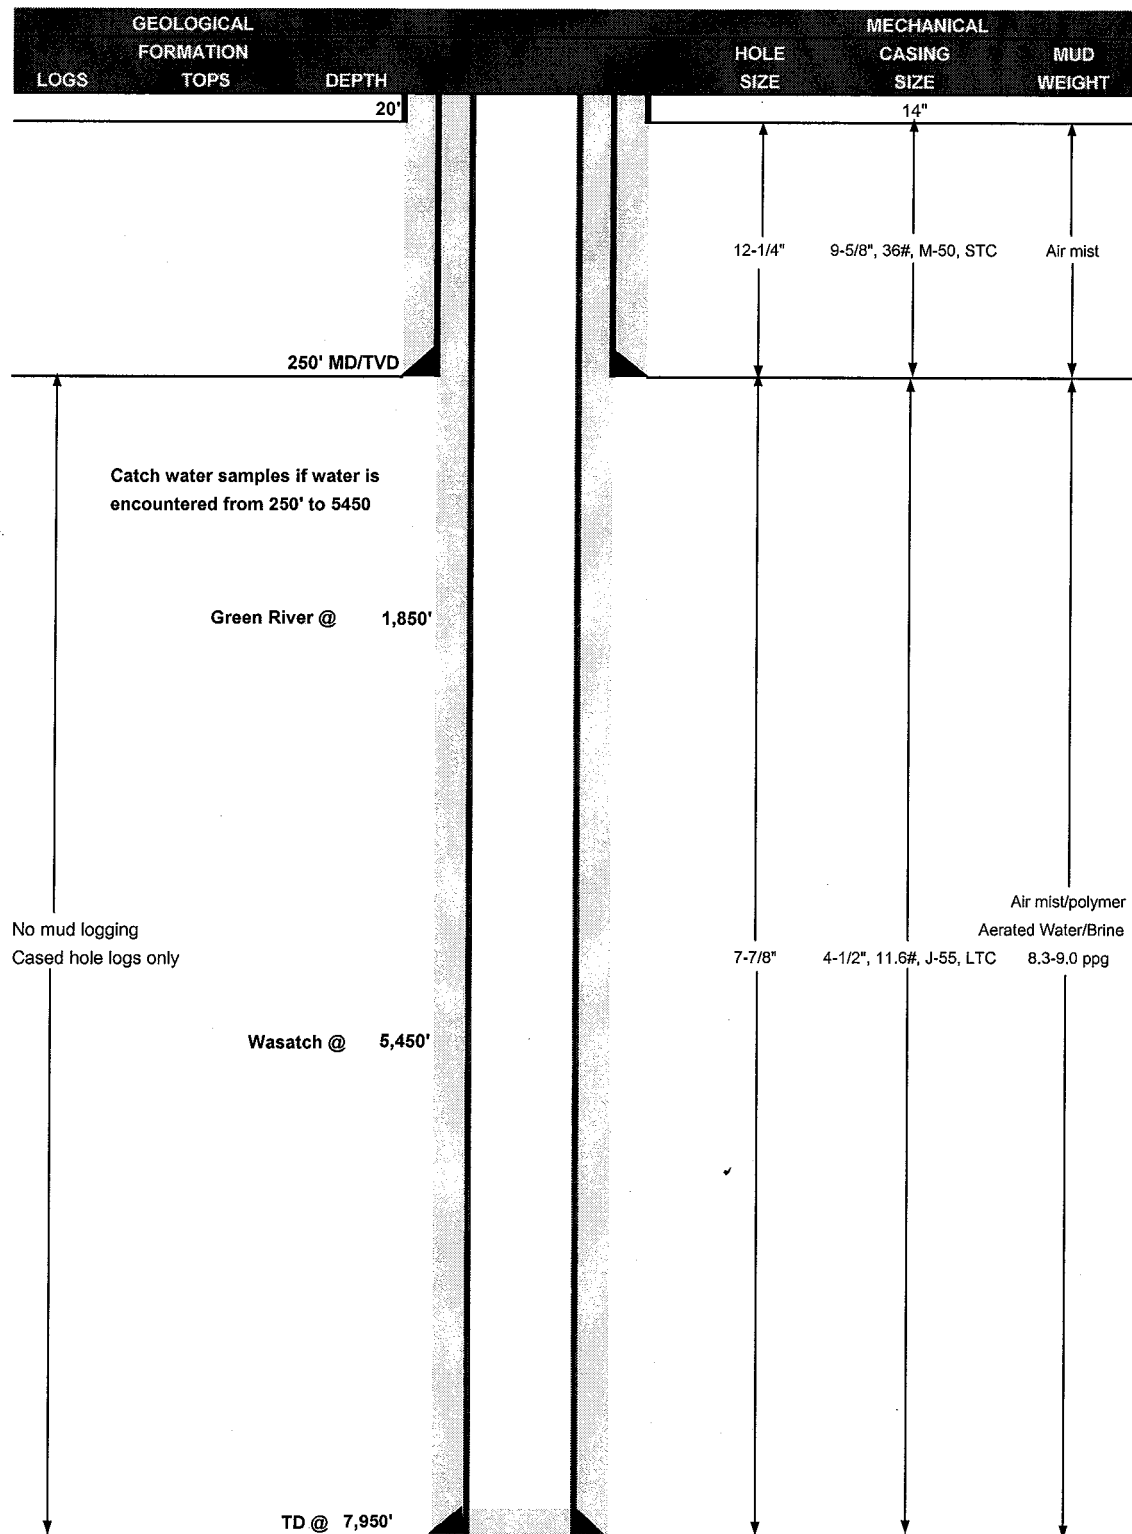

elpaso Production
DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0-250'	32.30	H-40	STC	16.19	11.71	4.37
						5350	4960	162000
PRODUCTION*	4-1/2"	0-TD	11.60	J-55	LTC	1.91	1.33	1.14

- 1) Maximum Anticipated Surface Pressure (MASP) (Conductor and Surface Casings) = (Frac Gradient at Shoe - Gas Gradient (0.115 psi/ft))(TVD)
 2) MASP (Int Casing) = Pore Pressure at Next Casing Point - (Gas Gradient x TVD of Next Casing Point x 0.67) - (Mud Weight x TVD x 0.052 x 0.33)
 3) MASP (Prod Casing) = Pore Pressure - (Gas Gradient x TVD of Production Interval)
 (Burst Assumptions: FG @ 8-5/8" shoe = 13.0 ppg, Max Pore Pressure = 9.0 ppg EMW)
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing, 50000 lbs overpull)

CEMENT PROGRAM

	FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	250	Class G + 2% CaCl ₂ + 0.25 pps celloflake	110	35%	15.80	1.16
PRODUCTION	LEAD 4,950'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	540	60%	11.00	3.38
	TAIL 3,000'	50/50 Poz/G + 10% salt + 2% gel	840	60%	14.30	1.31

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 3M with one annular and 2 rams. Test to 3,000 psi (annular to 1,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.

Drop Toico surveys on trips. Maximum allowable hole angle is 5 degrees.

Prepared by: C. Cameron

DRILLING ENGINEER:

Dan Lindsey

DATE:

**BAYLESS STATE 2-2
NWSE Sec. 2, T9S, R20E
Uintah County, UT
ML-47044**

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

Refer to Topo Map A for directions to the location.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

Refer to the attached directions to the proposed location site.

Refer to Topo Maps A and B for location of access roads within a 2 mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. Planned Access Roads:

Refer to Topo Map B for the location of the proposed access road.

The upgraded and new portions of the access road will be crowned and ditched with a running surface of 18 feet and a maximum disturbed width of 30 feet. Appropriate water control will be installed to control erosion.

The access road was centerline flagged during time of staking.

Surfacing material may be necessary, depending upon weather conditions.

Surface disturbance and vehicular traffic will be limited to the approved location and approved access route. Any additional area needed will be approved in advance.

3. Location of Existing Wells Within a 1-Mile Radius:

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities:

The following guidelines will apply if the well is productive.

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of

the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The required color is Carlsbad Canyon (2.5Y 6/2).

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Refer to Topo Map D for the proposed pipeline placement.

5. Location and Type of Water Supply:

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec. 32, T4S, R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

6. Source of Construction Materials:

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

7. Methods of Handling Waste Materials:

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner with felt shall be used. It will be a minimum of 12 mil thick, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E.

8. Ancillary Facilities:

None are anticipated.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

The reserve pit will be lined, and when the reserve pit is closed, the pit liner will be buried below plow depth.

All pits will be fenced according to the following minimum standards:

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Location size may change prior to the drilling pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

The location shall be bermed in order to prevent sediment from leaving location; as discussed during the on-site inspection.

10. Plans for Reclamation of the Surface:

Producing Location:

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

The plastic nylon reinforced liner shall be torn and perforated before backfilling of the reserve pit.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

11. Surface Ownership:

Ute Indian Tribe
Ft. Duchesne, UT
(435) 722-5141

12. Other Information:

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.

The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

A Class III archaeological survey has been conducted. Copies of this report were provided to the Ute Indian Tribe and the Bureau of Indian Affairs prior to the on-site inspection.

13. Lessee's or Operators's Representative & Certification:

Cheryl Cameron
Sr. Regulatory Analyst
El Paso Production Company
P.O. Box 1148
Vernal, UT 84078
(435) 781-7023

Scott Palmer
Drilling Manager
El Paso Production Company
9 Greenway Plaza
Houston, TX 77046
(832) 676-3391


Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

El Paso Production Company is considered to be the operator of the subject well. El Paso Production Company agrees to be responsible under terms and conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by El Paso Production Company, State Bond No. 400JU0705.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


Cheryl Cameron

02/17/03

Date

EL PASO PRODUCTION OIL & GAS COMPANY
BAYLESS STATE #2-2
SECTION 2, T9S, R20E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 3.2 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 1.0 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY, THEN NORTHEASTERLY DIRECTION APPROXIMATELY 2.0 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTH; FOLLOW ROAD FLAGS IN A NORTHERLY, THEN NORTHWESTERLY DIRECTION APPROXIMATELY 0.55 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 38.25 MILES.

EL PASO PRODUCTION OIL & GAS COMPANY
BAYLESS STATE #2-2
LOCATED IN UINTAH COUNTY, UTAH
SECTION 2, T9S, R20E, S.L.B.&M.

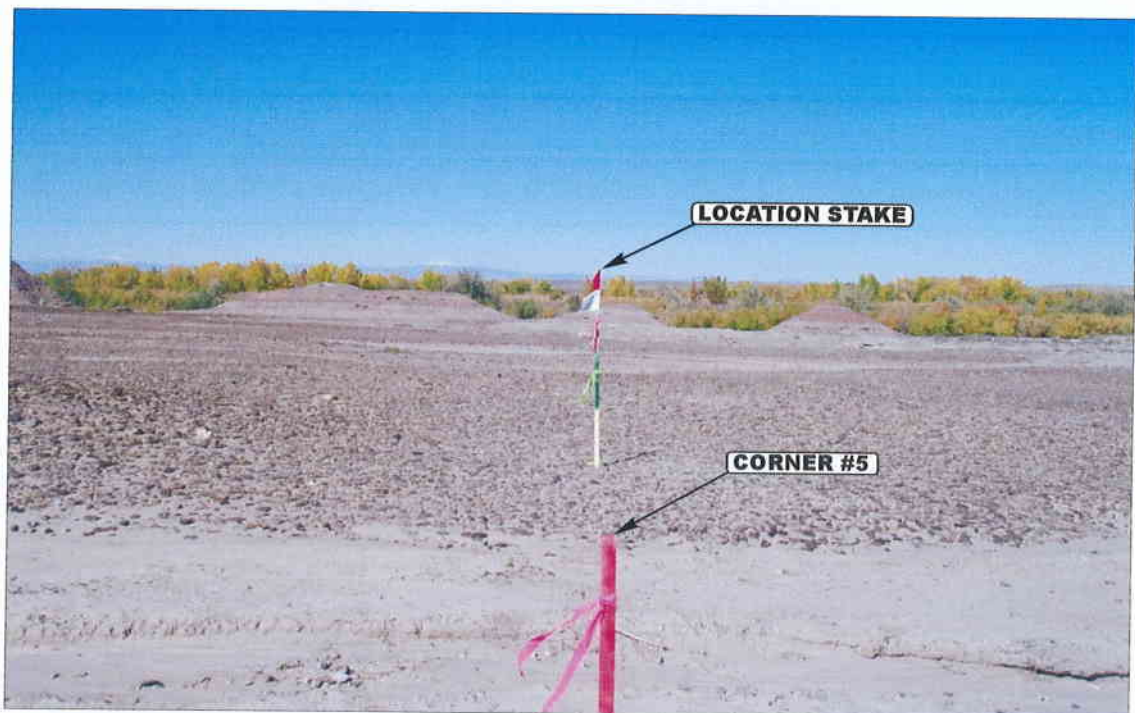


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHERLY

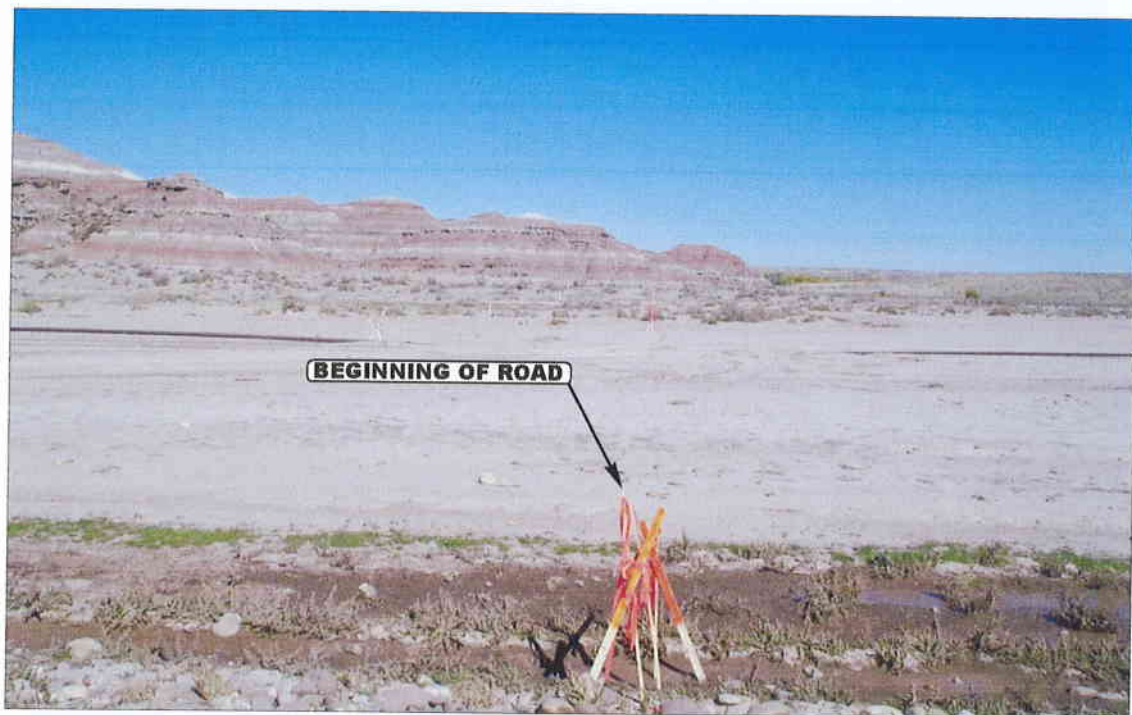


PHOTO: VIEW OF BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHERLY



U **E** **L** **S** **U** **E** **L** **S**
Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

10 **24** **02**
MONTH DAY YEAR

PHOTO



TAKEN BY: D.A.


DRAWN BY: P.M.

REVISED: 00-00-00

3,000 PSI

EOP STACK

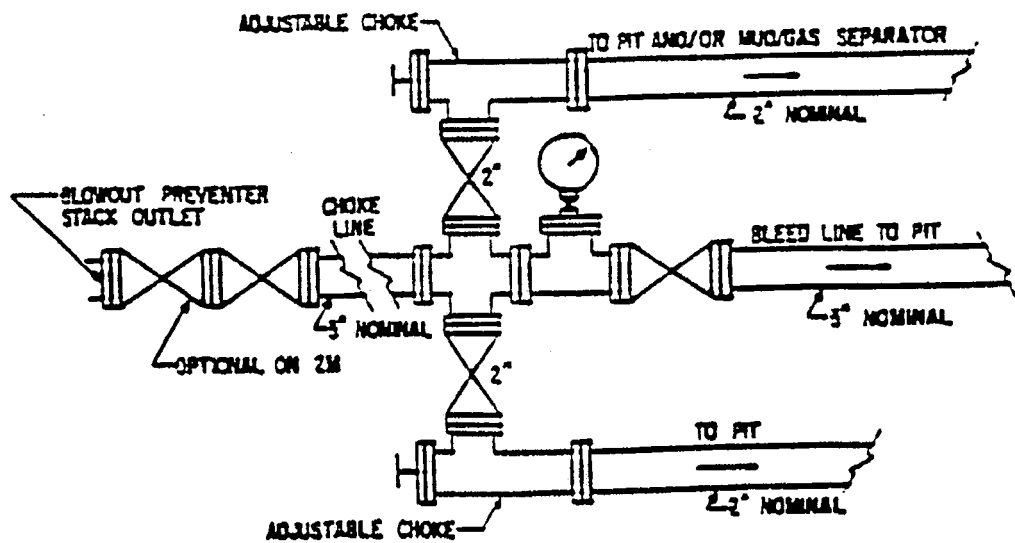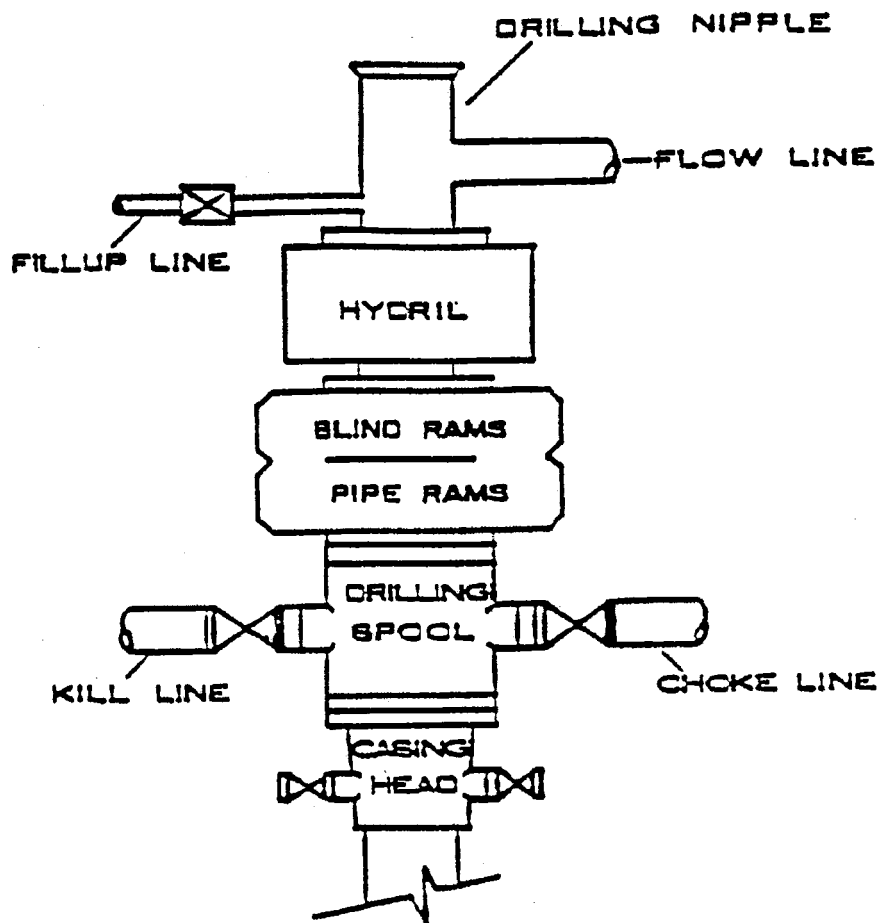

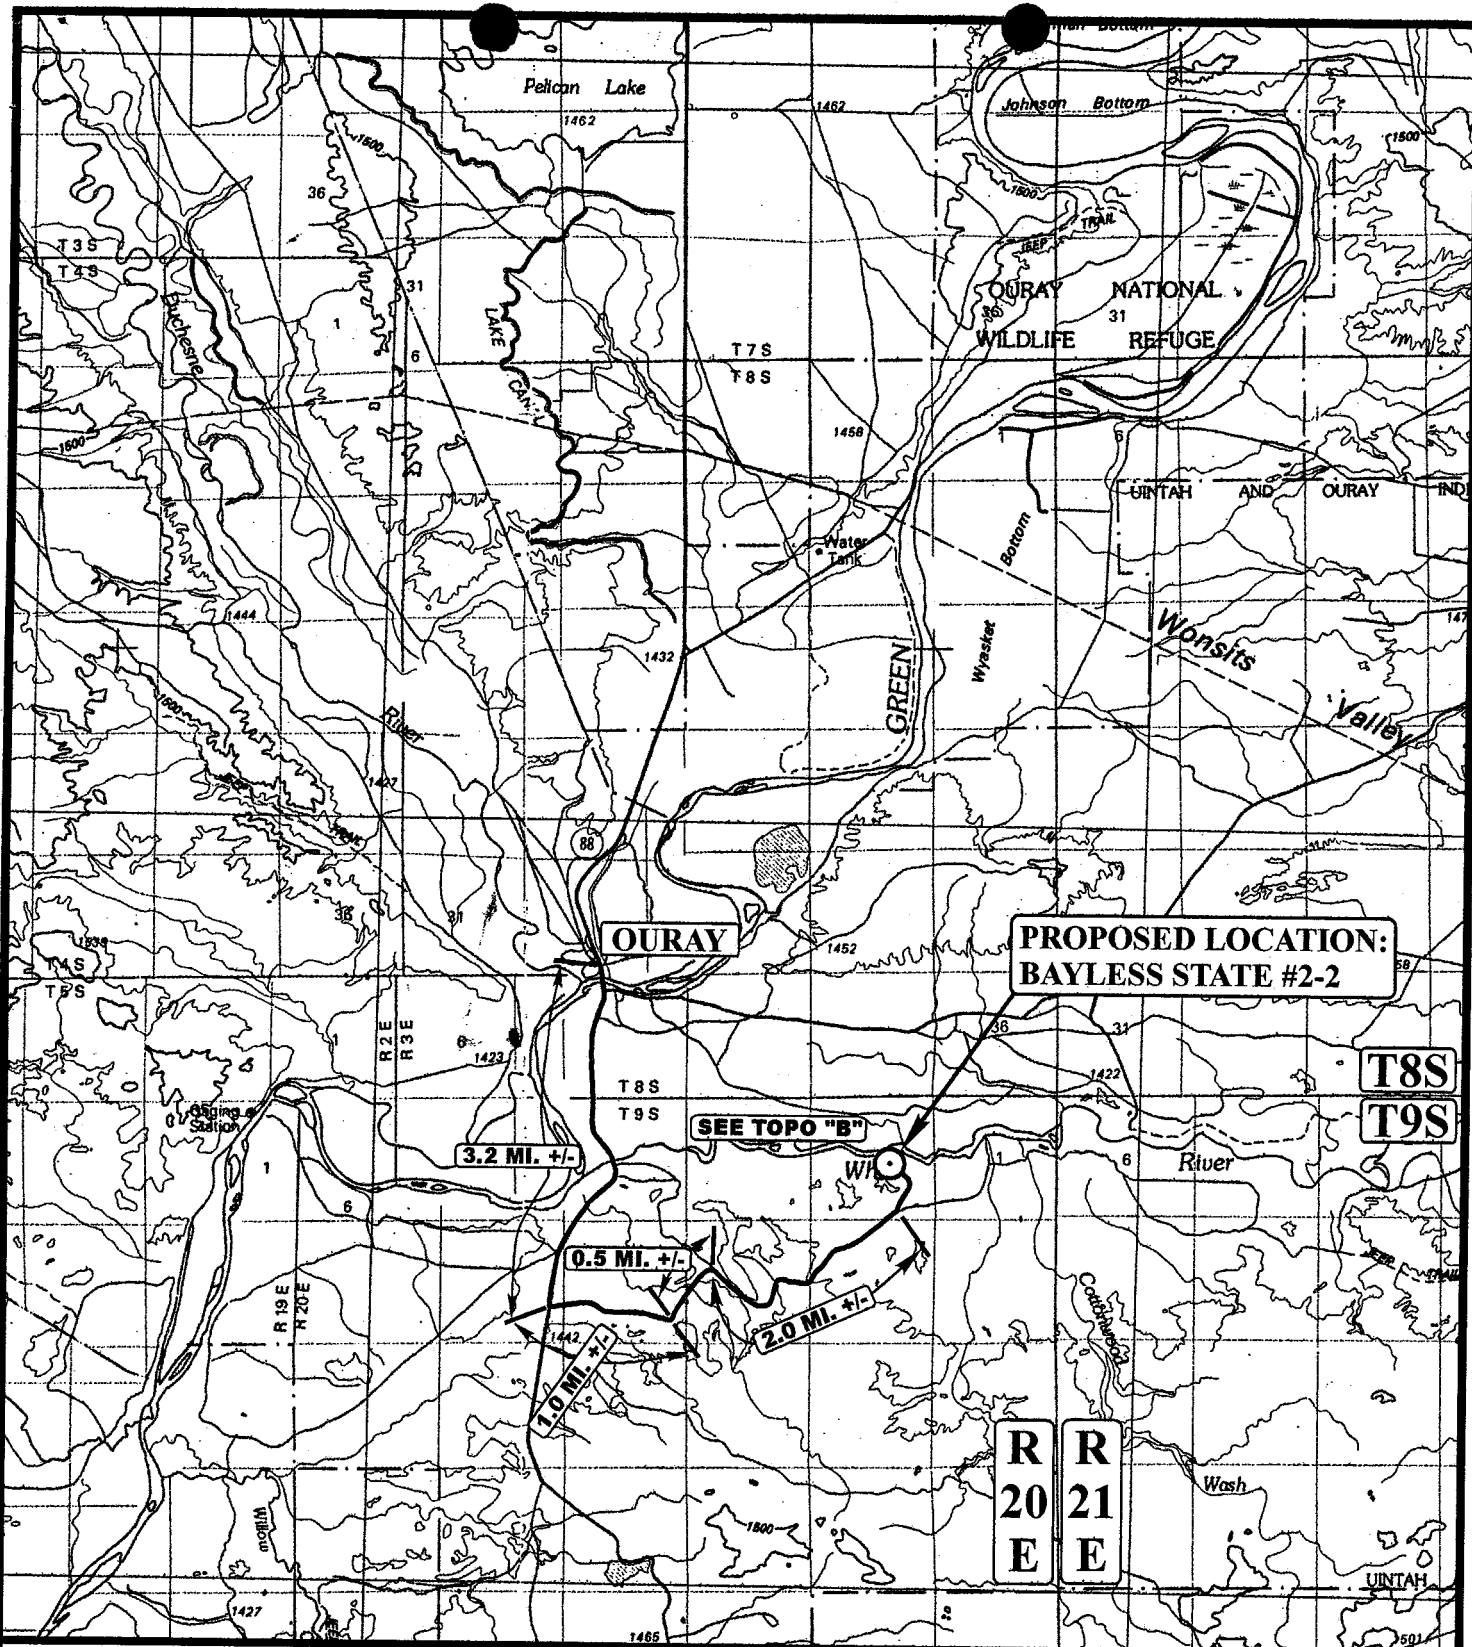

LEGEND:

○ PROPOSED LOCATION

EL PASO PRODUCTION OIL & GAS COMPANY

BAYLESS STATE #2-2

SECTION 2, T9S, R20E, S.L.B.&M.

2460' FSL 1937' FEL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813




TOPOGRAPHIC
MAP

10 24 02
MONTH DAY YEAR

SCALE: 1:100,000 DRAWN BY: P.M. REVISED: 00-00-00



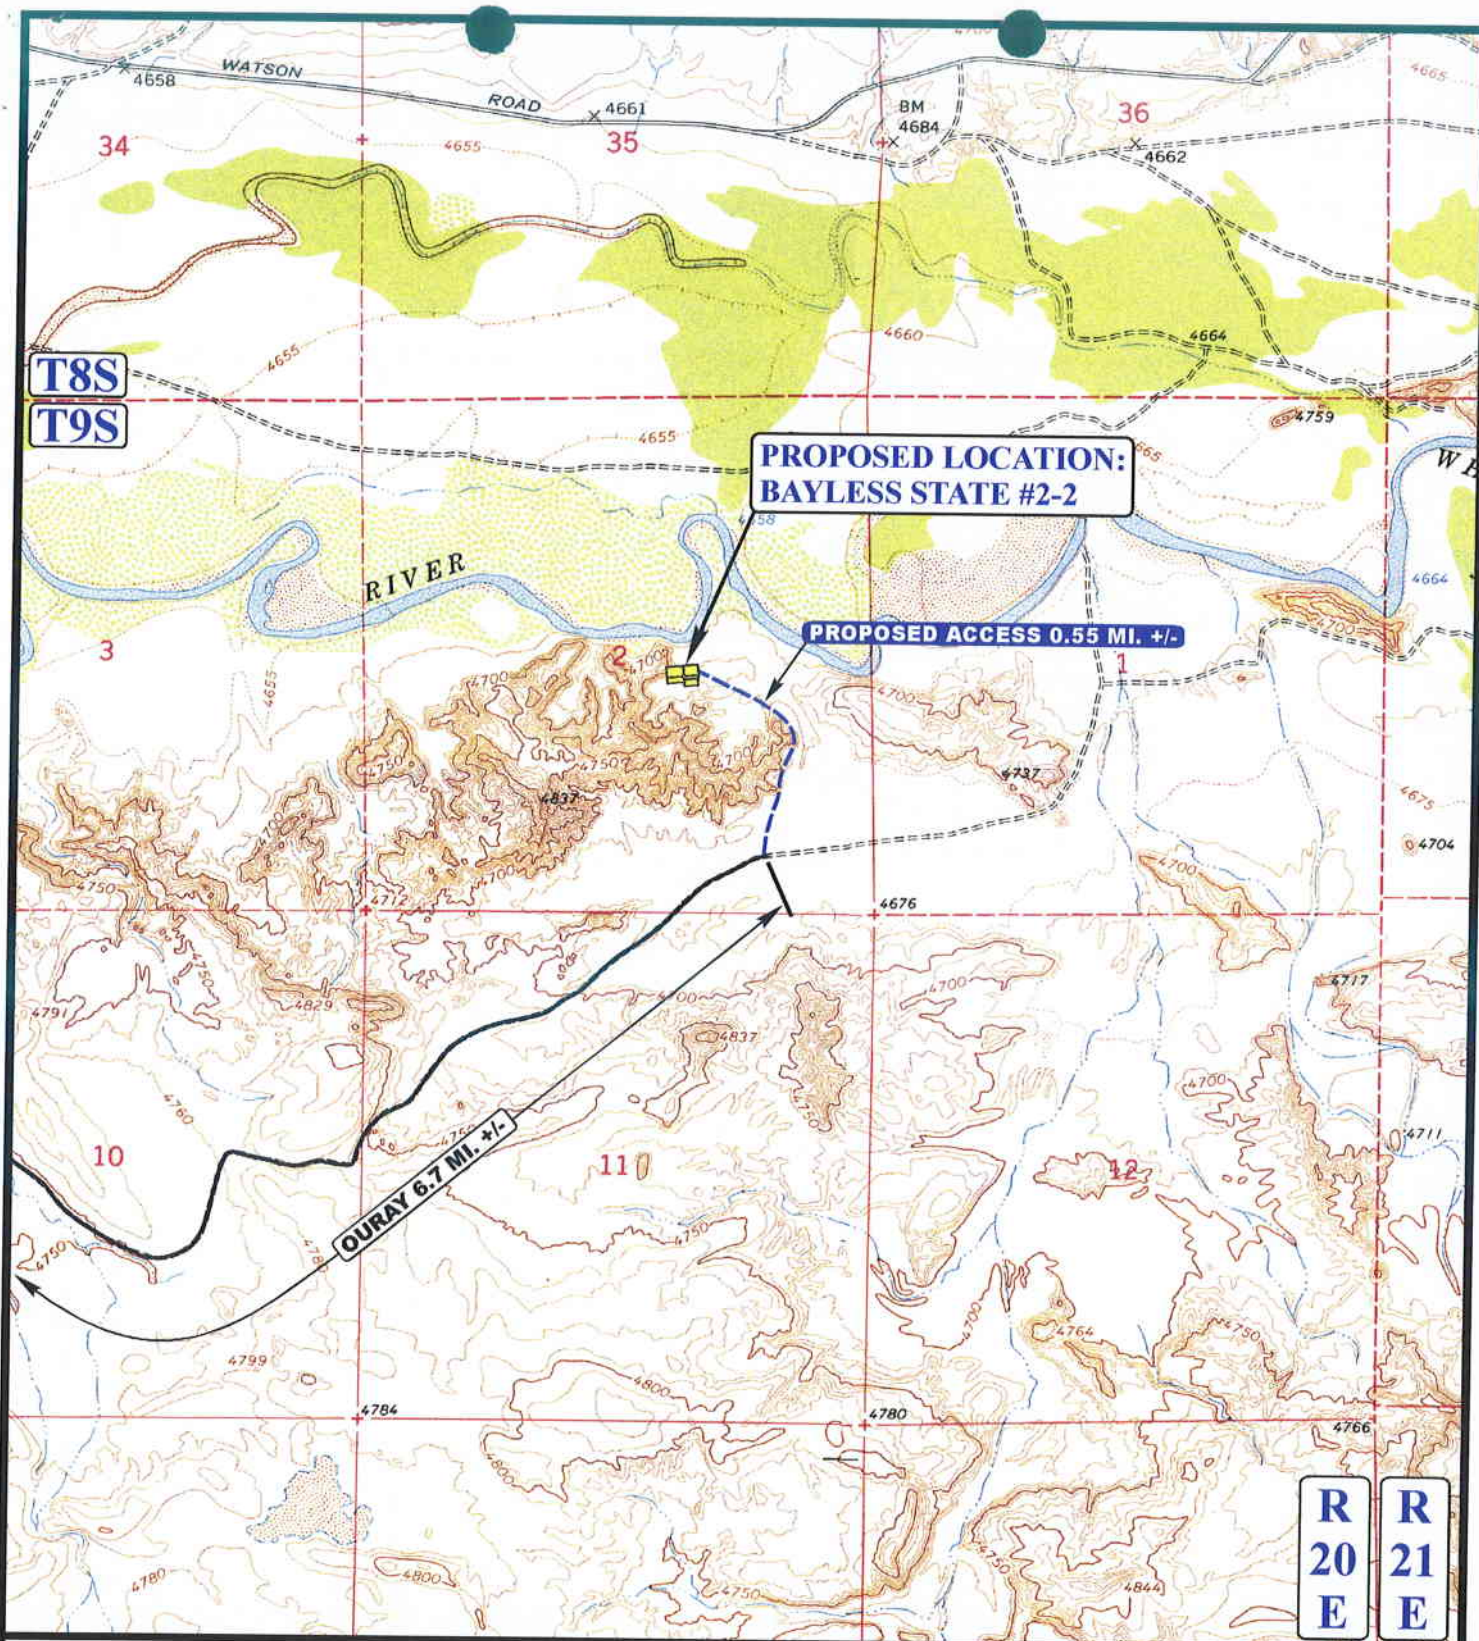

LEGEND:

- EXISTING ROAD
- - - PROPOSED ACCESS ROAD



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



EL PASO PRODUCTION OIL & GAS COMPANY


BAYLESS STATE #2-2
SECTION 2, T9S, R20E, S.L.B.&M.
2460' FSL 1937' FEL

TOPOGRAPHIC
MAP

10 24 02
 MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: P.M. REVISED: 00-00-00

B
TOPO

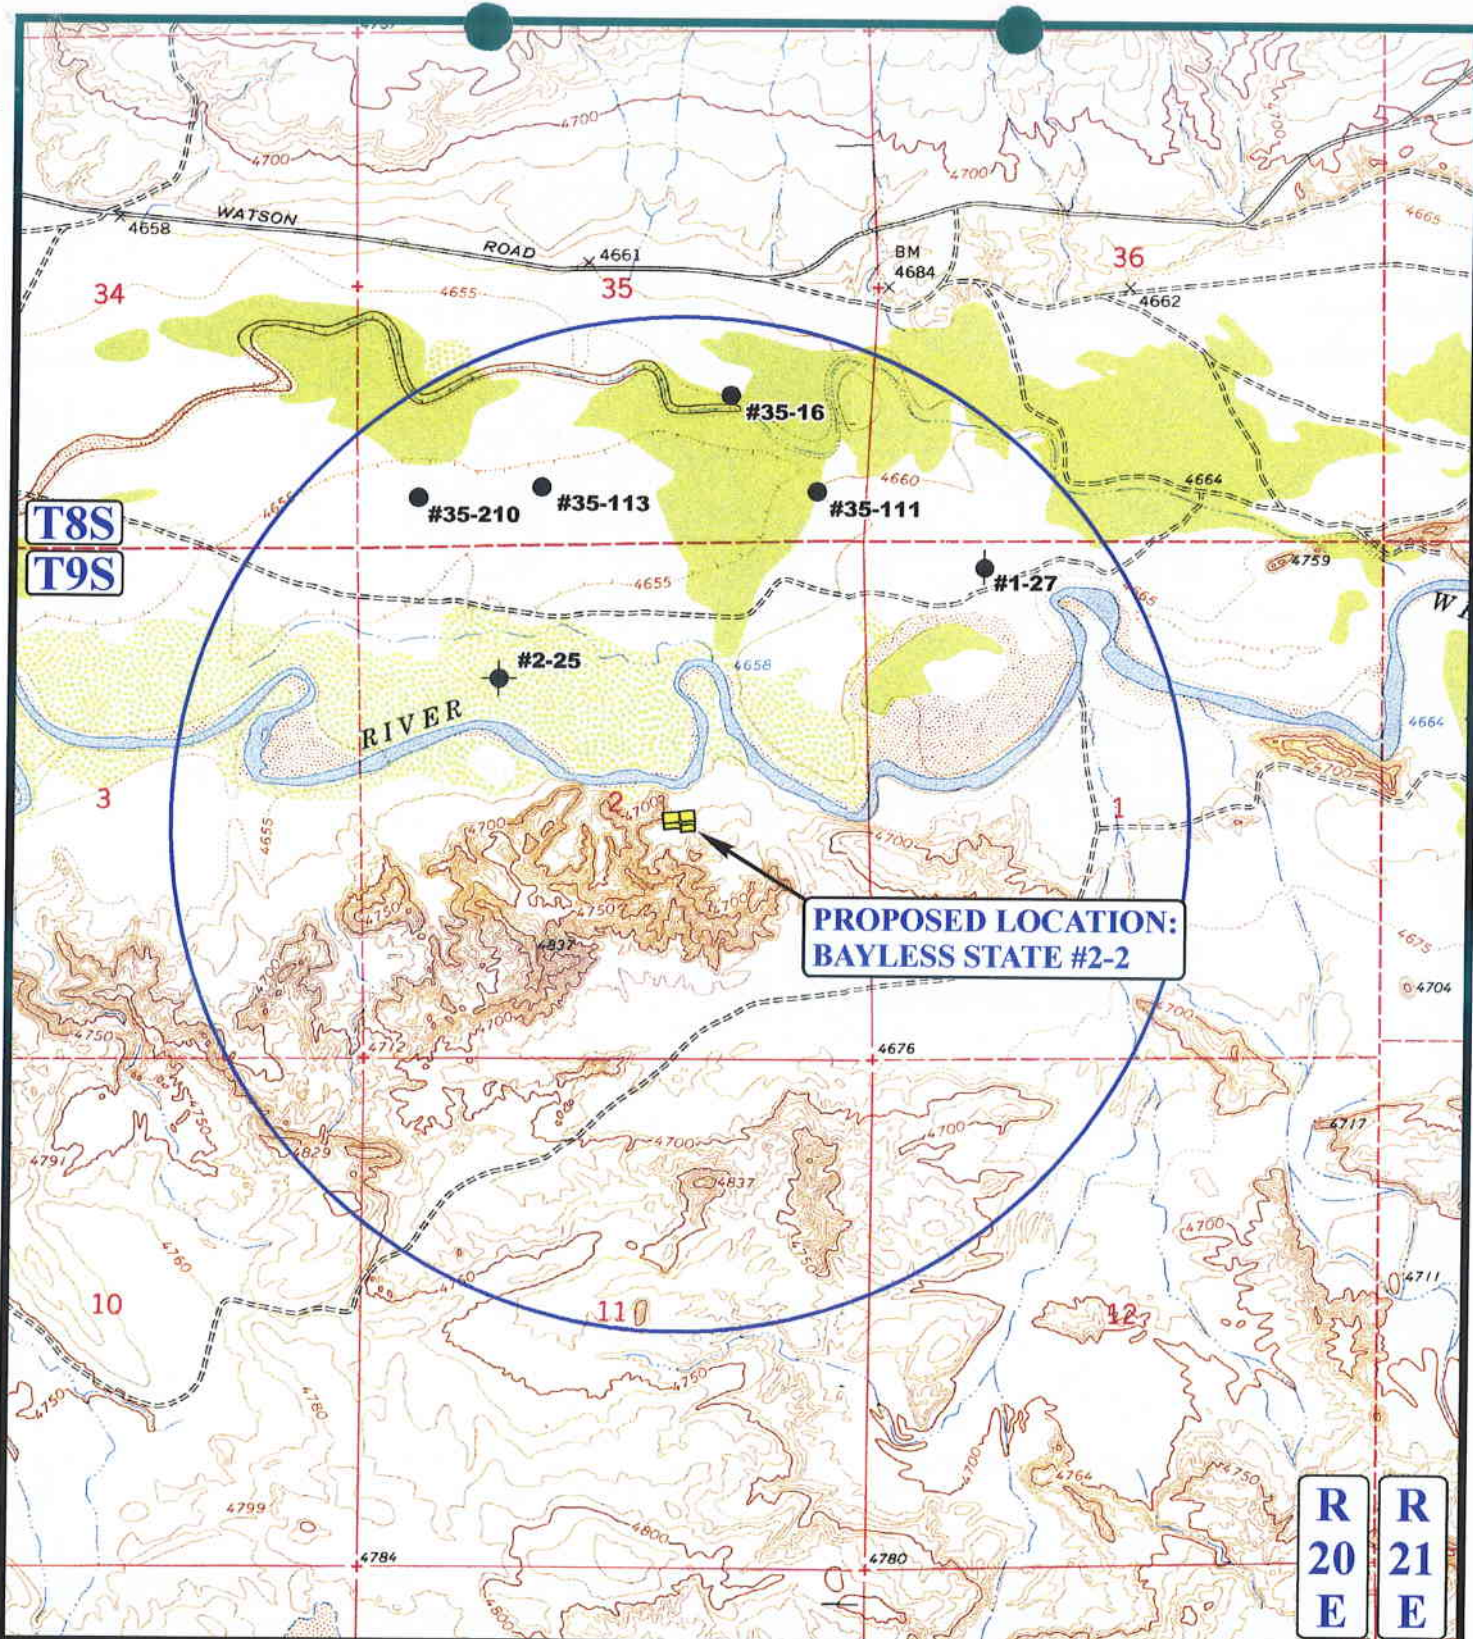

LEGEND:

- | | |
|-------------------|-------------------------|
| ⊗ DISPOSAL WELLS | ⊗ WATER WELLS |
| ● PRODUCING WELLS | ⊗ ABANDONED WELLS |
| ⊙ SHUT IN WELLS | ⊙ TEMPORARILY ABANDONED |



EL PASO PRODUCTION OIL & GAS COMPANY

BAYLESS STATE #2-2

SECTION 2, T9S, R20E, S.L.B.&M.

2460' FSL 1937' FEL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

10 24 02
MONTH DAY YEAR

SCALE: 1" = 2000'

DRAWN BY: P.M.

REVISED: 00-00-00



T9S

4655

4658

**PROPOSED LOCATION:
BAYLESS STATE #2-2**

PROPOSED ACCESS ROAD

PROPOSED PIPELINE

TIE-IN POINT

EXISTING PIPELINE




4676

11

**R
20
E**

APPROXIMATE TOTAL PIPELINE DISTANCE = 2,450' +/-

LEGEND:

-  PROPOSED ACCESS ROAD
-  EXISTING PIPELINE
-  PROPOSED PIPELINE



EL PASO PRODUCTION OIL & GAS COMPANY

BAYLESS STATE #2-2

SECTION 2, T9S, R20E, S.L.B.&M.

2460' FSL 1937' FEL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**



10 24 02
MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: P.M. REVISED: 00-00-00

**D
TOPO**


EL PASO PRODUCTION OIL & GAS COMPANY

LOCATION LAYOUT FOR
BAYLESS STATE #2-2
SECTION 2, T9S, R20E, S.L.B.&M.
2460' FSL 1937' FEL

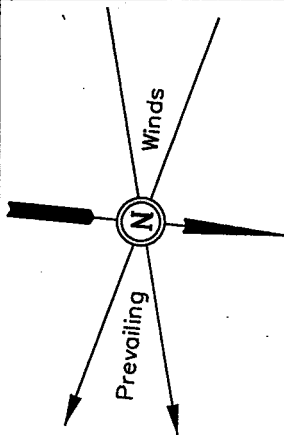

SCALE: 1" = 50'
DATE: 10-21-02
Drawn By: D.COX

NOTE:
Flare Pit is to be located
a min. of 100' from the
Well Head.

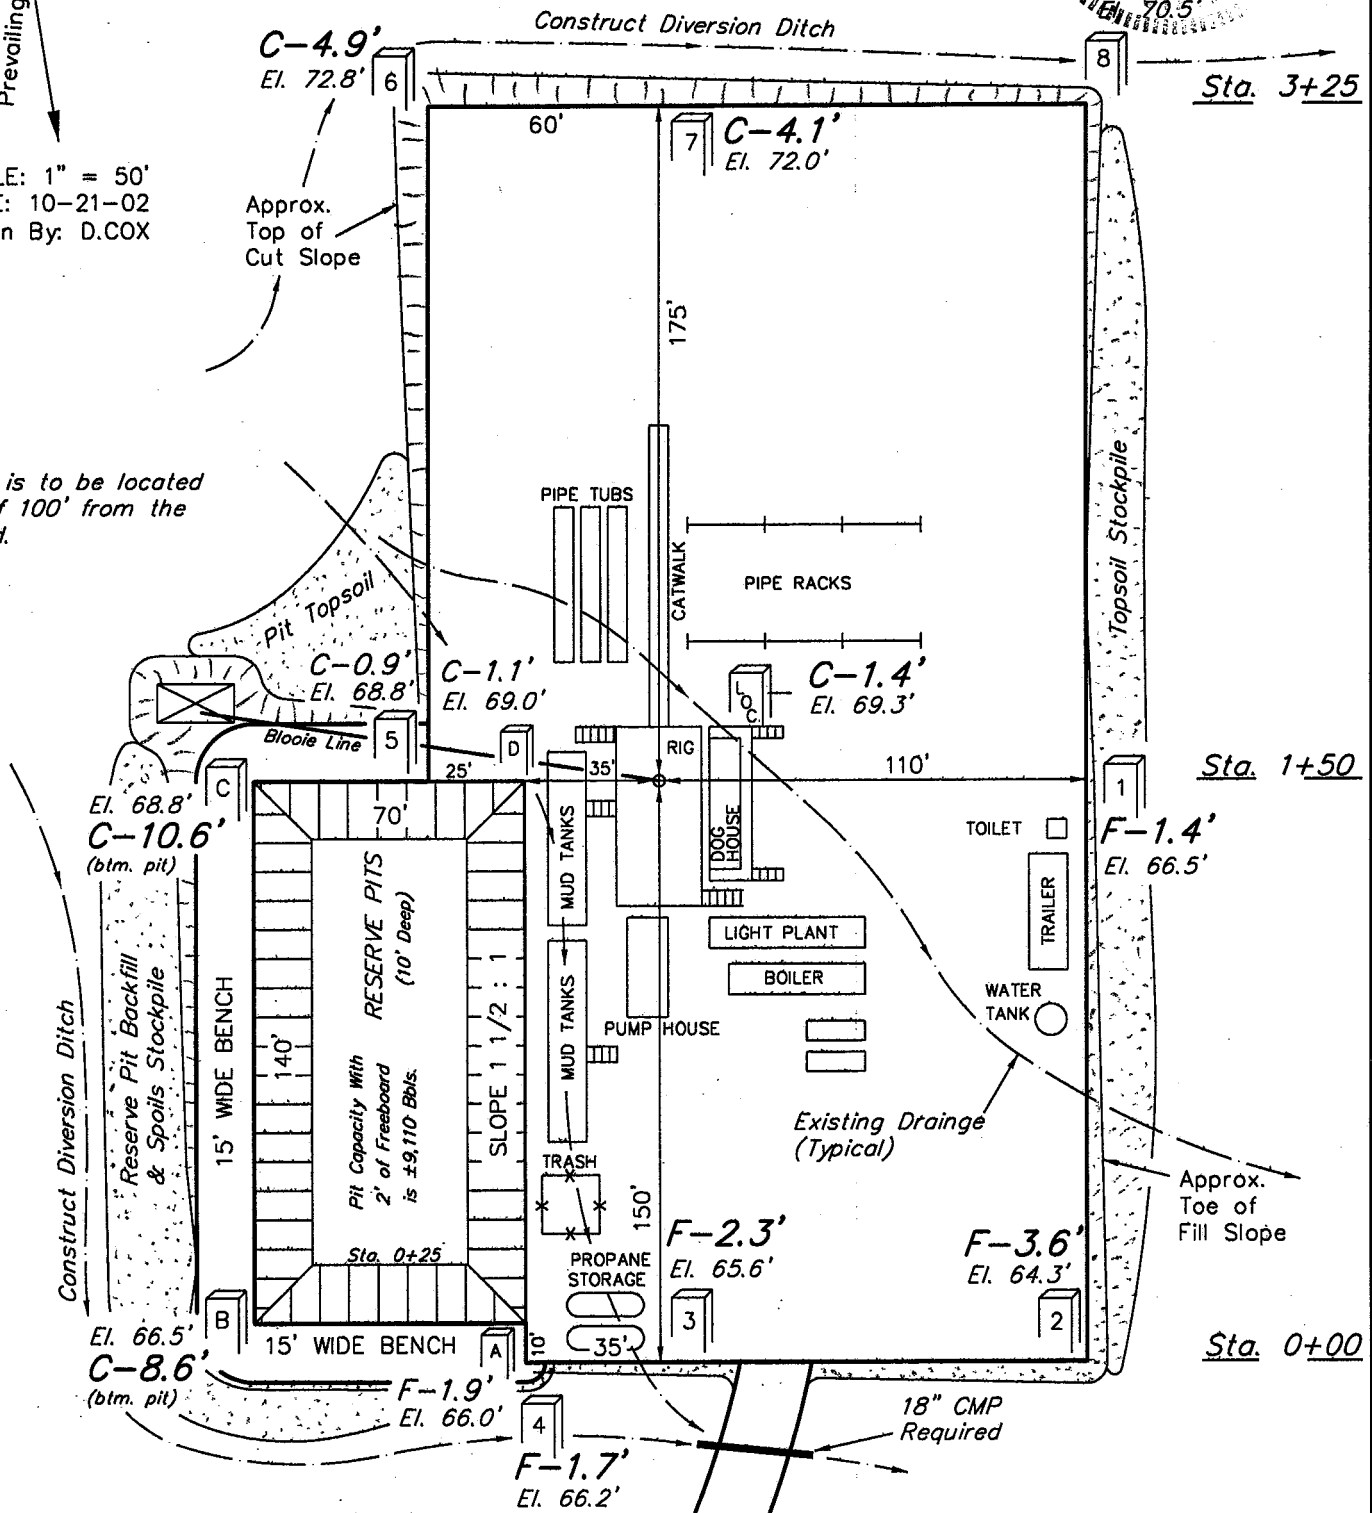

NOTES:

Elev. Ungraded Ground At Loc. Stake = 4669.3'
FINISHED GRADE ELEV. AT LOC. STAKE = 4667.9'

FIGURE #1

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017


EL PASO PRODUCTION OIL & GAS COMPANY

TYPICAL CROSS SECTIONS FOR

BAYLESS STATE #2-2

SECTION 2, T9S, R20E, S.L.B.&M.

2460' FSL 1937' FEL



1" = 20'
X-Section
Scale
1" = 50'

DATE: 10-21-02
Drawn By: D.COX

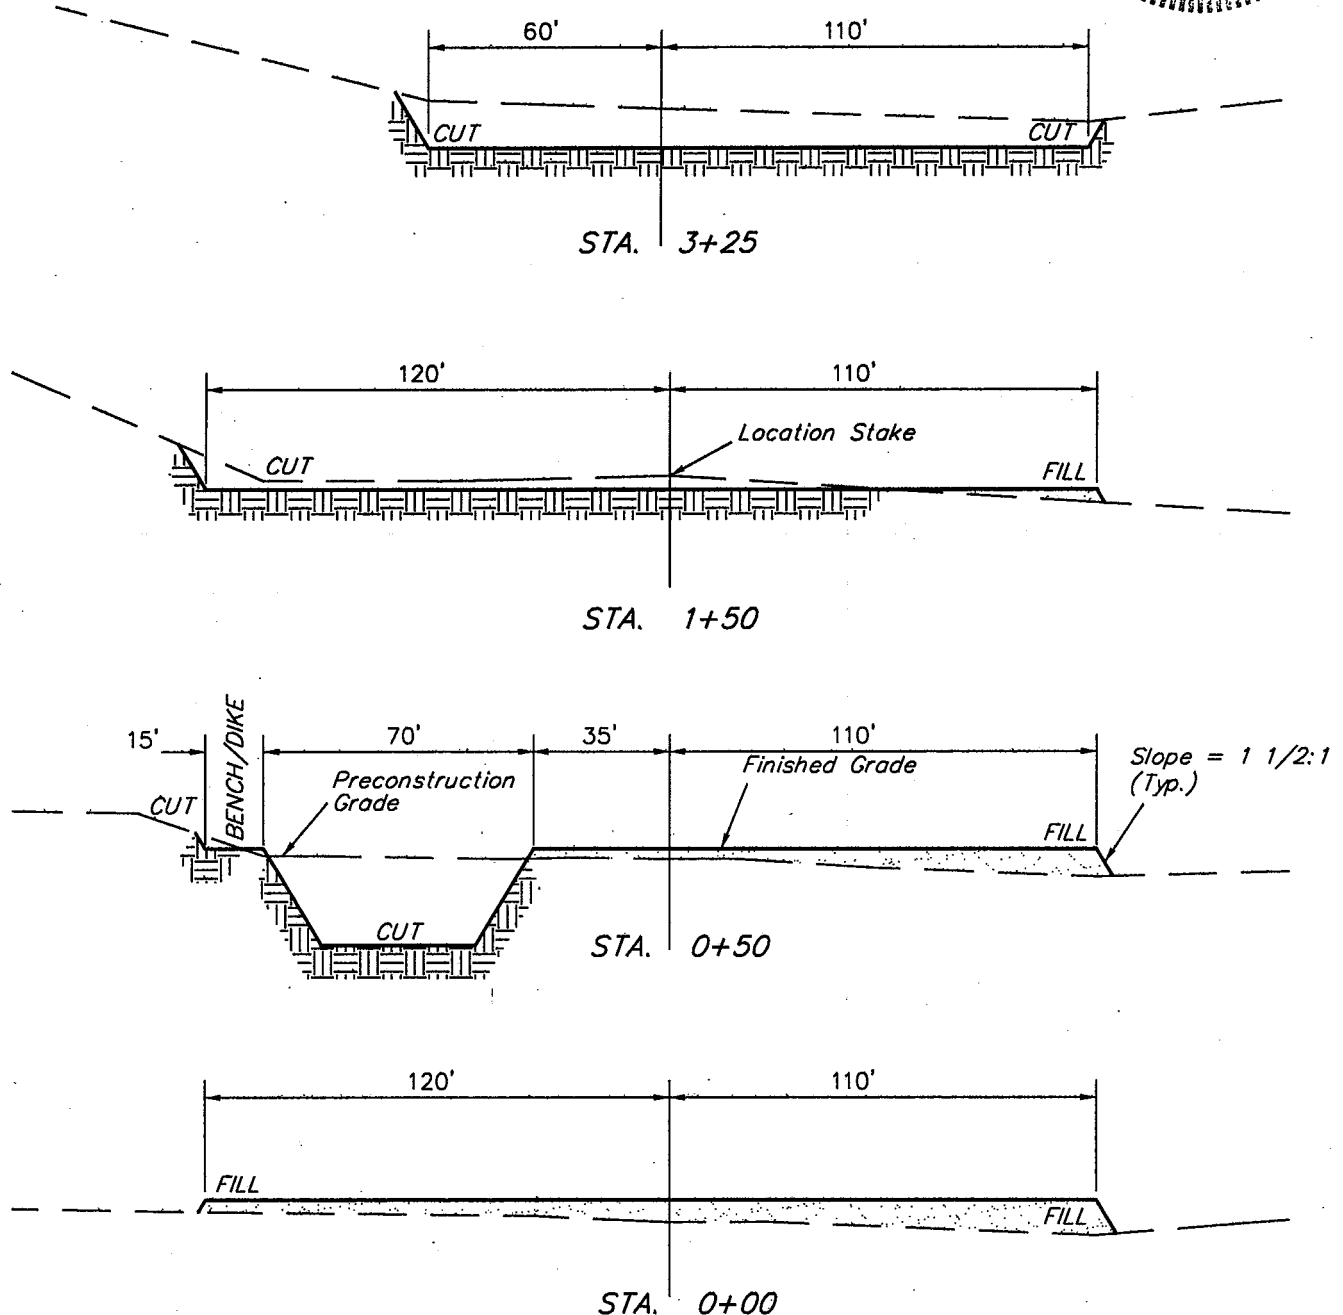


FIGURE #2

APPROXIMATE YARDAGES

CUT	
(12") Topsoil Stripping	= 2,420 Cu. Yds.
Remaining Location	= 3,640 Cu. Yds.
TOTAL CUT	= 6,060 CU.YDS.
FILL	= 2,230 CU.YDS.

EXCESS MATERIAL AFTER 5% COMPACTION	= 3,710 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,710 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

memorandum

Branch of Real Estate Services
Uintah & Ouray Agency

Date: 5 December, 2002

Reply to
Attn of: Supervisory Petroleum Engineer

Subject: Modification of Utah Division of Oil, Gas and Mining Regulations

To: Director, Utah Division of Oil, Gas and Mining Division: John Baza

We have been advised of changes occurring with the operation of your database for Change of Operator. You will be modifying your records to reflect Change of Operator once you have received all necessary documentation from the companies involved, and perhaps in advance of our Notice of Concurrence/Approval of Change of Operator where Indian leases are involved.


We have no objection.

With further comment to Rulemaking, I wish to comment concerning the provision of Exhibits for upcoming Hearings. I would like to see the Uintah & Ouray Agency, BIA, and the Ute Indian Tribe, Energy & Mineral Resources Department added to the list of those parties that receive advance Exhibits so as to allow us to have research time prior to Hearing dates. We will be able to provide a more informed recommendation to the Oil, Gas and Mining Board. It would be best if we would receive only those Exhibits that concern Indian lands, specifically on or adjacent to Indian lands. This may be a difficult situation to attain, as it is not always clear where 'on or adjacent' occurs.

I am aware that you have gone to extra effort to correct this matter already, and I fully appreciate it. My request is intended only to allow the addition of Uintah & Ouray Agency and Ute Indian Tribe to the official listing.

We appreciate your concern, and hope that these comments are timely enough for consideration in the revision process.

CC: Minerals & Mining Section of RES
Ute Energy & Mineral Resources Department: Executive Director
chronos





WESTPORT OIL AND GAS COMPANY, L.P.

410 Seventeenth Street #2300 Denver Colorado 80202-4436
Telephone: 303 573 5404 Fax: 303 573 5609

February 1, 2002

Department of the Interior
Bureau of Land Management
2850 Youngfield Street
Lakewood, CO 80215-7093
Attention: Ms. Martha Maxwell

RE: BLM Bond CO-1203
BLM Nationwide Bond 158626364
Surety - Continental Casualty Company
Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.
Conversion of Westport Oil and Gas Company, Inc., into Westport Oil and Gas Company, L.P.
Assumption Rider - Westport Oil and Gas Company, L.P.

Dear Ms. Maxwell:

Pursuant to our recent conversations, please find the following list of enclosures for the BLM's consideration and approval:

Two (2) Assumption Riders, fully executed originals.
Copies of Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.
Copies of Westport Oil and Gas Company, Inc., conversion into Westport Oil and Gas Company, L.P.
List of all Federal/BIA/State Leases - Belco/Westport's leases - in all states.

Please inform us of any additional information needed to complete the change to Westport Oil and Gas Company, L.P., as operator of record.

I thank you for your assistance and cooperation in this matter. Please do not hesitate contacting the undersigned, should a question arise.

Sincerely,
Westport Oil and Gas Company, L.P.

Debby J. Black
Engineer Technician

Encl:

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 02/24/2003

API NO. ASSIGNED: 43-047-34904

WELL NAME: BAYLESS ST 2-2
OPERATOR: EL PASO PROD OIL & GAS (N1845)
CONTACT: CHERYL CAMERON

PHONE NUMBER: 435-781-7023

PROPOSED LOCATION:

NWSE 02 090S 200E
SURFACE: 2460 FSL 1937 FEL
BOTTOM: 2460 FSL 1937 FEL
UINTAH
NATURAL BUTTES (630)

LEASE TYPE: 3 - State
LEASE NUMBER: ML-47044
SURFACE OWNER: 2 - Indian
PROPOSED FORMATION: WSTC

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	DKD	3/5/03
Geology		
Surface		

LATITUDE: 40.06400
LONGITUDE: 109.63077

RECEIVED AND/OR REVIEWED:


- ☒ Plat
- ☒ Bond: Fed[] Ind[] Sta[3] Fee[]
(No. 400JU0705)
- ☒ Potash (Y/N)
- ☒ Oil Shale 190-5 (B) or 190-3 or 190-13
- ☒ Water Permit
(No. 43-8496)
- ☒ RDCC Review (Y/N)
(Date:)
- ☒ Fee Surf Agreement (Y/N)

LOCATION AND SITING:

- ☐ R649-2-3.
Unit
- ☐ R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- ☐ R649-3-3. Exception
- ☒ Drilling Unit
Board Cause No: 123-16 (8/330')
Eff Date: 1-13-00
Siting: 420' fr ulp boundary & 920' fr other wells.
- ☐ R649-3-11. Directional Drill

COMMENTS:

STIPULATIONS: ① Surface Casing Cont Stip
② Oil Shale
③ STATEMENT OF BASIS

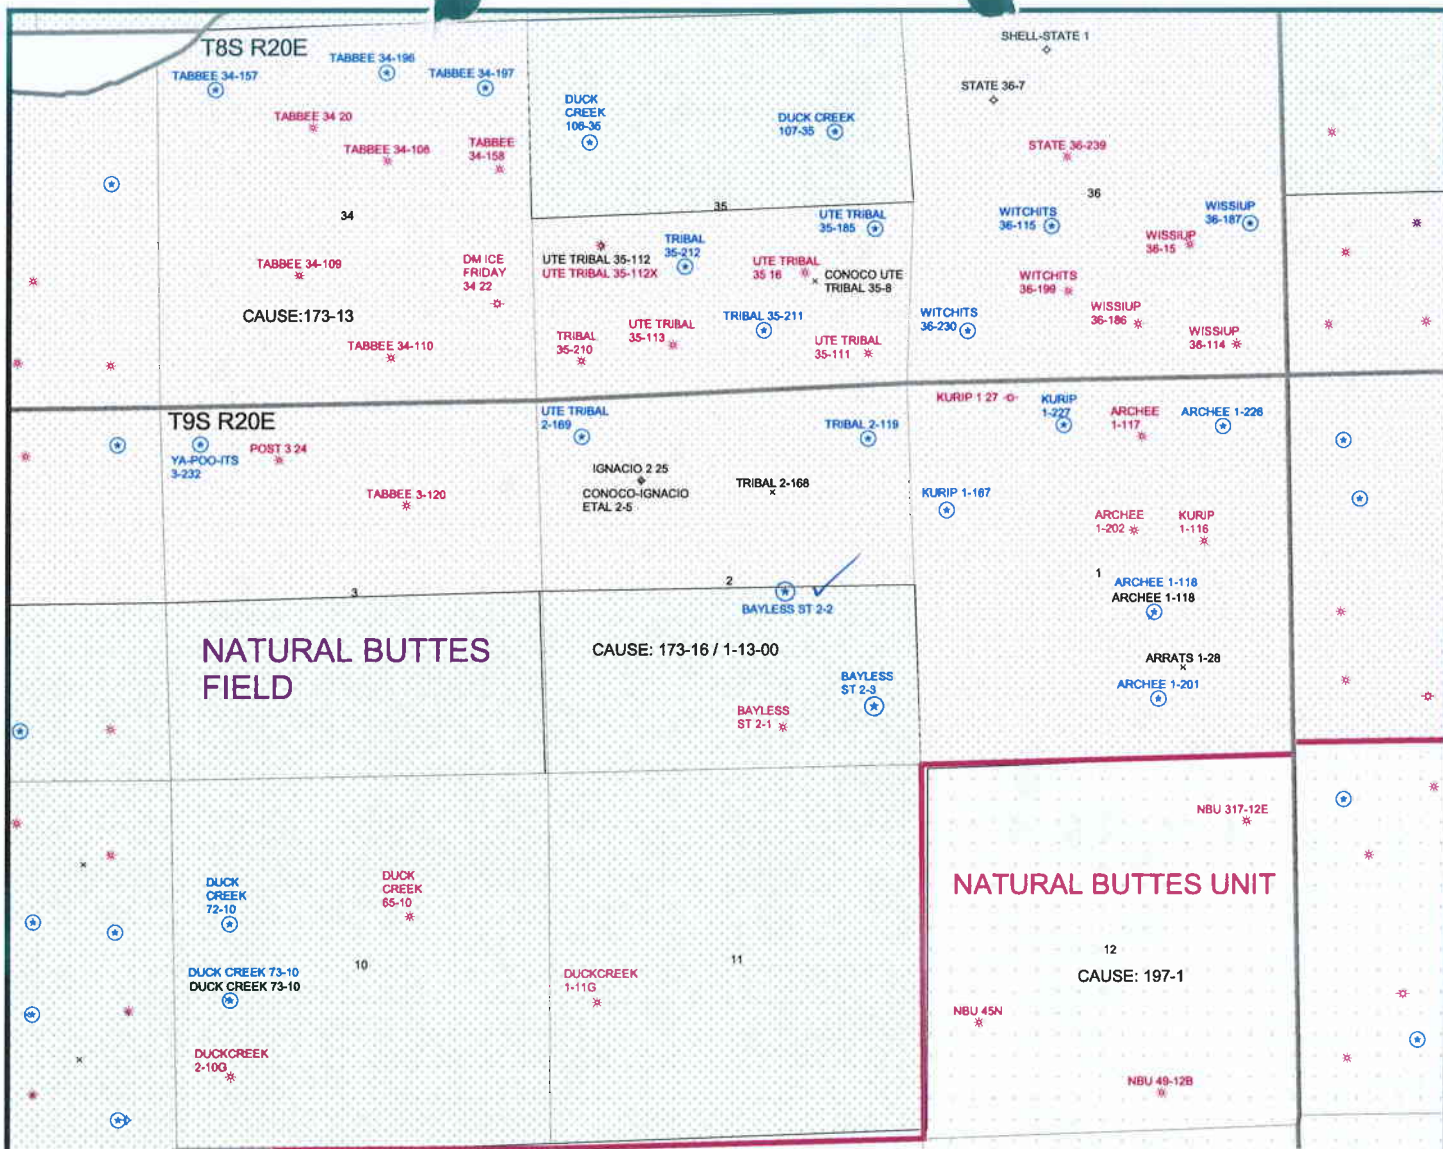


OPERATOR: EL PASO PRODUCTION (N1845)

SEC. 2 T9S, R20E

FIELD: NATURAL BUTTES (630)

COUNTY: UINTAH

CAUSE: 173-16 / 1-13-00

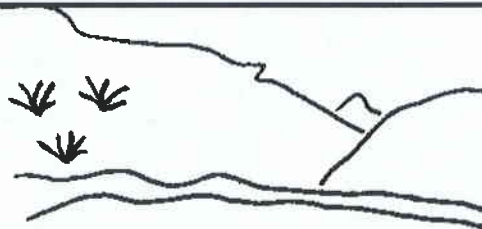

Utah Oil Gas and Mining

WELLS


- GAS INJECTION
- GAS STORAGE
- LOCATION ABANDONED
- NEW LOCATION
- PLUGGED & ABANDONED
- PRODUCING GAS
- PRODUCING OIL
- SHUT-IN GAS
- SHUT-IN OIL
- TEMP. ABANDONED
- TEST WELL
- WATER INJECTION
- WATER SUPPLY
- WATER DISPOSAL

UNIT STATUS

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

FIELD STATUS

- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED
- COUNTY BOUNDARY
- SECTION LINES
- TOWNSHIP LINES



PREPARED BY: DIANA MASON
DATE: 27-FEBRUARY-2003

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER:
2. NAME OF OPERATOR: El Paso Production Oil & Gas Company		6. IF INDIAN, ALLOTTEE OR TRIBE NAME
3. ADDRESS OF OPERATOR: 9 Greenway Plaza Houston TX 77064-0995		7. UNIT or CA AGREEMENT NAME:
PHONE NUMBER: (832) 676-5933		8. WELL NAME and NUMBER: Exhibit "A"
4. LOCATION OF WELL FOOTAGES AT SURFACE: QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		9. API NUMBER:
		10. FIELD AND POOL, OR WILDCAT:
		COUNTY:
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	


12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Operator change to Westport Oil and Gas Company, L.P., 1670 Broadway, Suite 2800, Denver, CO. 80202-4800, effective December 17, 2002.

BOND # _____

State Surety Bond No. RLB0005236
Fee Bond No. RLB0005238


EL PASO PRODUCTION OIL & GAS COMPANY

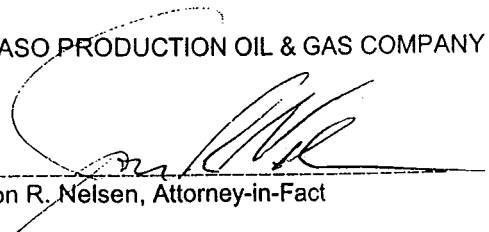By: 
Jon R. Nelsen, Attorney-in-Fact

RECEIVED

FEB 28 2003

DIV. OF OIL, GAS & MINING

WESTPORT OIL AND GAS COMPANY, L.P.		TITLE Agent and Attorney-in-Fact	
NAME (PLEASE PRINT) David R. Dix			
SIGNATURE 		DATE 12/17/02	

(This space for State use only)

DIVISION OF OIL, GAS AND MINING
APPLICATION FOR PERMIT TO DRILL
STATEMENT OF BASIS

OPERATOR: El Paso Production O&G Co.
WELL NAME & NUMBER: Bayless State 2-2
API NUMBER: 43-047-34904
LOCATION: 1/4, 1/4 NW/SE Sec: 2 TWP: 9S RNG: 20E 2460' FSL 1937' FEL

Geology/Ground Water:

El Paso proposes to set 250' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 200'. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the center of section 2. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. The proposed casing and cement program should adequately protect any useable ground water at this location.

Reviewer: Brad Hill **Date:** 03/05/2003

Surface:

Surface rights at the proposed location are owned by the Ute Indian Tribe. Shenandoah is responsible for obtaining any rights-of-way or surface permits needed from the Ute Tribe.

Reviewer: Brad Hill **Date:** 03/05/2003

Conditions of Approval/Application for Permit to Drill:

None.

UTAH DIVISION OF WATER RIGHTS
WATER RIGHT POINT OF DIVERSION PLOT CREATED WED, MAR 5, 2003, 1:52 PM
PLOT SHOWS LOCATION OF 0 POINTS OF DIVERSION

PLOT OF AN AREA WITH A RADIUS OF 10000 FEET FROM A POINT
FEET, FEET OF THE CT CORNER,
SECTION 2 TOWNSHIP 9S RANGE 20E SL BASE AND MERIDIAN

PLOT SCALE IS APPROXIMATELY 1 INCH = 4000 FEET

N O R T H

**

**

**

**

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*


*

*


*

*

*

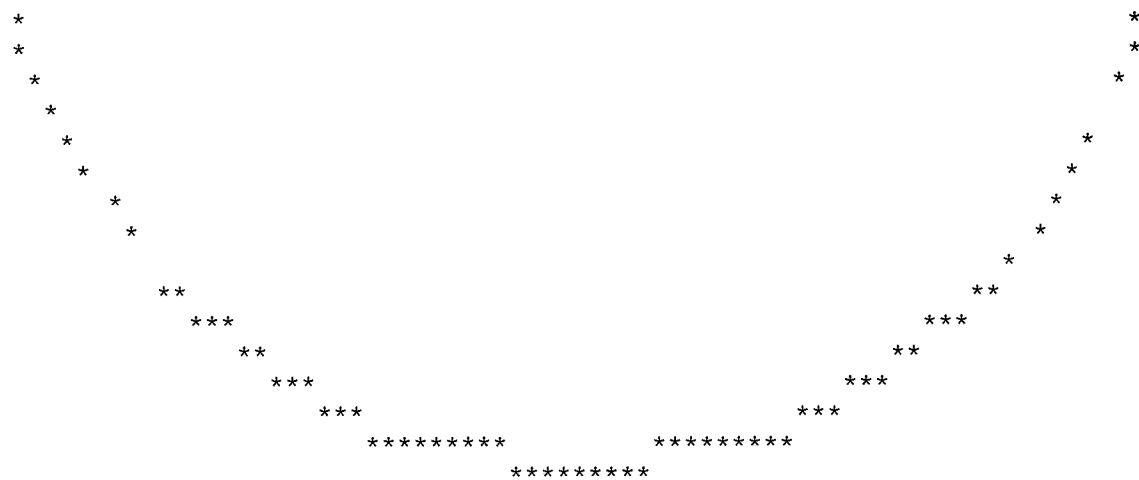

Casing Schematic

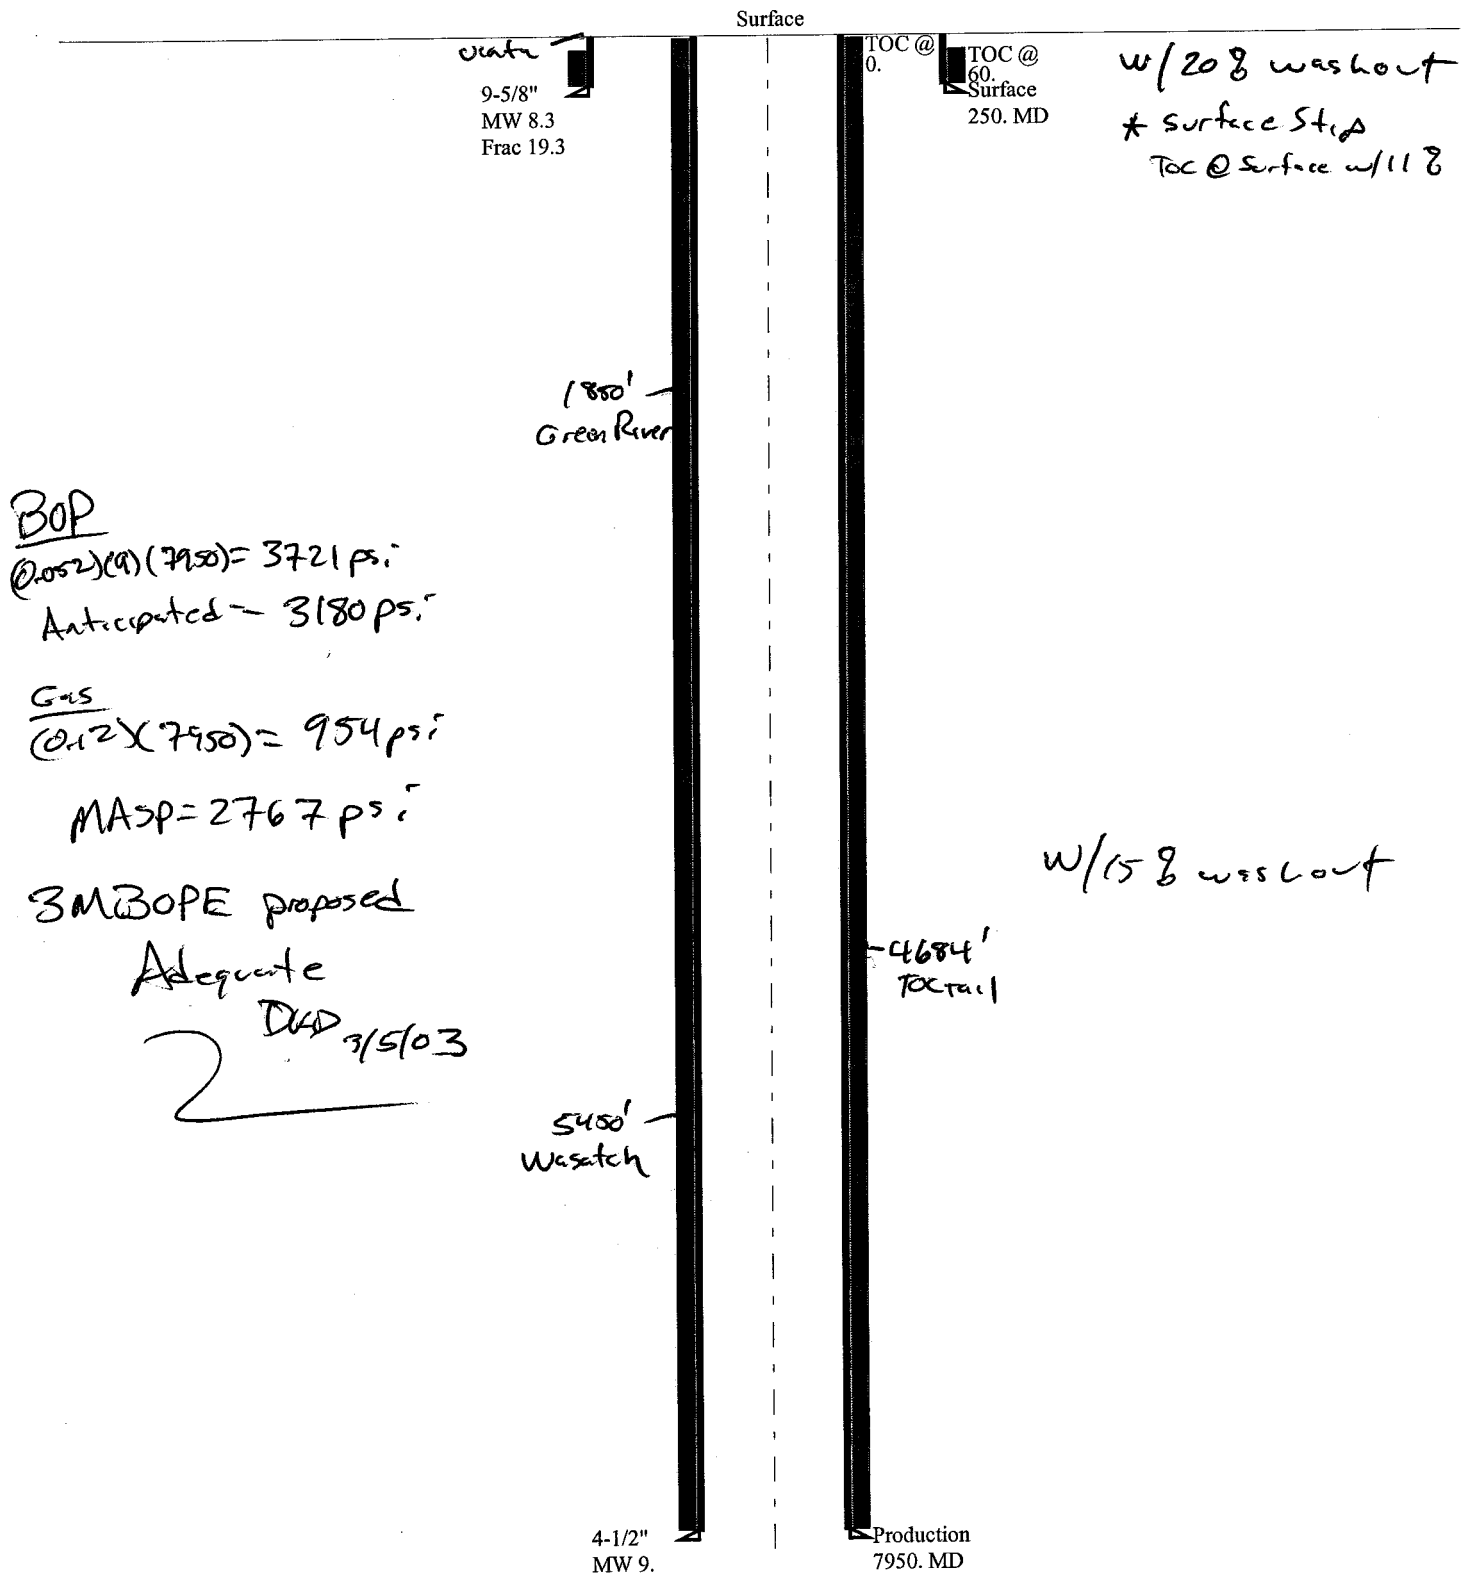

Well name:

03-03 El Paso Bayless State 2-2Operator: **El Paso Production Company**String type: **Surface**

Project ID:

43-047-34904

Location: **Uintah County****Design parameters:****Collapse**

Mud weight: 8.330 ppg

Design is based on evacuated pipe.

Minimum design factors:**Collapse:**

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No

Surface temperature: 65 °F

Bottom hole temperature: 68 °F

Temperature gradient: 1.40 °F/100ft

Minimum section length: 200 ft

Cement top: 60 ft

Burst

Max anticipated surface pressure:

0 psi

Internal gradient: 0.468 psi/ft

Calculated BHP 117 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)

8 Round LTC: 1.80 (J)

Buttress: 1.60 (J)

Premium: 1.50 (J)

Body yield: 1.50 (B)

Tension is based on air weight.

Neutral point: 219 ft

Non-directional string.

Re subsequent strings:

Next setting depth: 7,950 ft

Next mud weight: 9.000 ppg

Next setting BHP: 3,717 psi

Fracture mud wt: 19.250 ppg

Fracture depth: 250 ft

Injection pressure 250 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	250	9.625	36.00	H-40	ST&C	250	250	8.765	17.8

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	108	1720	15.90	117	2560	21.90	9	294	32.67 J

Prepared by: Dustin Doucet
Utah Dept. of Natural ResourcesPhone: 801-538-5281
FAX: 801-359-3940Date: March 4, 2003
Salt Lake City, Utah**ENGINEERING STIPULATIONS: Oil shale**

Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Collapse is based on a vertical depth of 250 ft, a mud weight of 8.33 ppg. The casing is considered to be evacuated for collapse purposes.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:

03-03 El Paso Bayless State 2-2

Operator:

El Paso Production Company

String type:

Production

Project ID:

43-047-34904

Location:

Uintah County

Design parameters:**Collapse**

Mud weight: 9.000 ppg

Design is based on evacuated pipe.

Minimum design factors:**Collapse:**

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No

Surface temperature: 65 °F

Bottom hole temperature: 176 °F

Temperature gradient: 1.40 °F/100ft

Minimum section length: 368 ft

Cement top:

Surface

Burst

Max anticipated surface pressure:

0 psi

Internal gradient: 0.468 psi/ft

Calculated BHP 3,717 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)

8 Round LTC: 1.80 (J)

Buttress: 1.60 (J)

Premium: 1.50 (J)

Body yield: 1.50 (B)

Non-directional string.

Tension is based on air weight.

Neutral point: 6,880 ft

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	7950	4.5	11.60	J-55	LT&C	7950	7950	3.875	184.3
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	3717	4960	1.33	3717	5350	1.44	92	162	1.76 J

Prepared by: Dustin Doucet
Utah Dept. of Natural ResourcesPhone: 801-538-5281
FAX: 801-359-3940Date: March 4, 2003
Salt Lake City, Utah**ENGINEERING STIPULATIONS: Oil shale**

Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Collapse is based on a vertical depth of 7950 ft, a mud weight of 9 ppg. The casing is considered to be evacuated for collapse purposes.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

WESTPORT OIL & GAS COMPANY, L.P.

3a. Address

P.O. BOX 1148 VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7023

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED EXHIBIT "A"

5. Lease Serial No.

SEE ATTACHED EXHIBIT "A"

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

SEE ATTACHED EXHIBIT "A"

9. API Well No.

SEE ATTACHED EXHIBIT "A"

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize <input type="checkbox"/> Deepen <input type="checkbox"/> Production (Start/Resume) <input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Reclamation <input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair <input type="checkbox"/> New Construction <input type="checkbox"/> Recomplete <input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans <input type="checkbox"/> Plug and Abandon <input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection <input type="checkbox"/> Plug Back <input type="checkbox"/> Water Disposal
	SUCCESSOR OF OPERATOR

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zc. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator determined that the site is ready for final inspection.

WESTPORT OIL & GAS COMPANY, L.P., IS CONSIDERED TO BE THE OPERATOR ON THE ATTACHED DESCRIBED LANDS AND IS RESPONSIBLE UNDER THE TERMS AND CONDITIONS OF THE LEASE FOR THE OPERATIONS CONDUCTED ON THE LEASED LANDS OR PORTIONS THEREOF, BOND COVERAGE FOR THIS WELL IS PROVIDED BY FEDERAL NATIONWIDE BOND NO. 158626364, EFFECTIVE FEBRUARY 1, 2002, AND BIA NATIONWIDE BOND NO. RLB0005239, EFFECTIVE FEBRUARY 10, 2003.

RECEIVED

MAR 04 2003

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

CHERYL CAMERON

Title

OPERATIONS

Date

March 4, 2003

Signature

Cheryl Cameron

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)



State of Utah

DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

1594 West North Temple, Suite 1210

PO Box 145801

Salt Lake City, Utah 84114-5801

(801) 538-5340 telephone

(801) 359-3940 fax

(801) 538-7223 TTY

www.nr.utah.gov

Michael O. Leavitt
Governor

Robert L. Morgan
Executive Director

Lowell P. Braxton
Division Director

March 5, 2003

El Paso Production Oil & Gas Company

PO Box 1148

Vernal, UT 84078

Re: Bayless State 2-2 Well, 2460' FSL, 1937' FEL, NW SE, Sec. 2, T. 9 South, R. 20 East,
Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-34904.

Sincerely,

John R. Baza

Associate Director

mj/er

Enclosures

cc: Uintah County Assessor
SITLA

Operator: El Paso Production Oil & Gas Company
Well Name & Number Bayless State 2-2
API Number: 43-047-34904
Lease: ML 47044

Location: NW SE Sec. 2 T. 9 South R. 20 East

Conditions of Approval

1. **General**

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for Permit to Drill.

2. **Notification Requirements**

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- 24 hours prior to cementing or testing casing
- 24 hours prior to testing blowout prevention equipment
- 24 hours prior to spudding the well
- within 24 hours of any emergency changes made to the approved drilling program
- prior to commencing operations to plug and abandon the well

The following are Division of Oil, Gas and Mining contacts and their work telephone numbers (please leave a voice mail message if the person is not available to take the call):

- Dan Jarvis at (801) 538-5338
- Carol Daniels at (801) 538-5284 (spud)

3. **Reporting Requirements**

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.

5. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

6. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)

7. Surface casing shall be cemented to the surface.

OPERATOR CHANGE WORKSHEET

ROUTING

1. GLH

2. CDW ✓

3. FILE

005

X Change of Operator (Well Sold)

Designation of Agent/Operator

Operator Name Change

Merger

The operator of the well(s) listed below has changed, effective: 12-17-02

FROM: (Old Operator):

EL PASO PRODUCTION OIL & GAS COMPANY

Address: 9 GREENWAY PLAZA

HOUSTON, TX 77064-0995

Phone: 1-(832)-676-5933

Account No. N1845

TO: (New Operator):

WESTPORT OIL & GAS COMPANY LP

Address: P O BOX 1148

VERNAL, UT 84078

Phone: 1-(435)-781-7023

Account No. N2115

CA No.

Unit:

WELL(S)

NAME	SEC TWN RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SW HANGING ROCK FED 23-1	23-12S-23E	43-047-34231	99999	FEDERAL	GW	APD
SW HANGING ROCK FED 24-1	24-12S-23E	43-047-34232	99999	FEDERAL	GW	APD
SW HANGING ROCK FED 25-1	25-12S-23E	43-047-34233	99999	FEDERAL	GW	APD
UTE TRIBAL 14-23	23-04S-01E	43-047-33834	99999	INDIAN	OW	APD
UTE TRIBAL 3-25	25-04S-01E	43-047-33540	99999	INDIAN	OW	APD
UTE TRIBAL 15-25	25-04S-01E	43-047-33834	99999	INDIAN	GW	APD
UTE TRIBAL 2-25	25-04S-01E	43-047-34431	99999	INDIAN	GW	APD
UTE TRIBAL 10-25	25-04S-01E	43-047-34435	99999	INDIAN	GW	APD
UTE TRIBAL 3-26	26-04S-01E	43-047-34724	99999	INDIAN	OW	APD
UTE TRIBAL 11-26	26-04S-01E	43-047-34731	99999	INDIAN	OW	APD
UTE TRIBAL 4-26	26-04S-01E	43-047-34732	99999	INDIAN	OW	APD
UTE TRIBAL 5-26	26-04S-01E	43-047-34733	99999	INDIAN	OW	APD
UTE TRIBAL 6-26	26-04S-01E	43-047-34734	99999	INDIAN	OW	APD
UTE TRIBAL 12-26	26-04S-01E	43-047-34746	99999	INDIAN	OW	APD
UTE TRIBAL 3-36	36-04S-01E	43-047-33867	99999	INDIAN	OW	APD
ANKERPONT 35-224	35-08S-21E	43-047-34736	99999	INDIAN	GW	NEW
ARCHEE 1-118	01-09S-20E	43-047-34825	99999	INDIAN	GW	NEW
BAYLESS ST 2-2	02-09S-20E	43-047-34904	99999	STATE	GW	APD
BAYLESS ST 2-3	02-09S-20E	43-047-34905	99999	STATE	GW	APD
NBU 393	22-09S-20E	43-047-34864	99999	FEDERAL	GW	APD
NBU 392	22-09S-20E	43-047-34877	99999	FEDERAL	GW	APD

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 02/28/2003
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 03/04/2003
3. The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 03/06/2003
4. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181

5. If **NO**, the operator was contacted contacted on: _____

6. (R649-9-2)Waste Management Plan has been received on: IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM-12/31/2003 BIA-12/5/02

8. **Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: 02/27/2003

9. **Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: 01/09/2003

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 03/27/2003

2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 03/27/2003

3. Bond information entered in RBDMS on: N/A

4. Fee wells attached to bond in RBDMS on: N/A

STATE WELL(S) BOND VERIFICATION:

1. State well(s) covered by Bond Number: RLB 0005236

FEDERAL WELL(S) BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: 158626364

INDIAN WELL(S) BOND VERIFICATION:

1. Indian well(s) covered by Bond Number: RLB 0005239

FEE WELL(S) BOND VERIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB 0005238

2. The **FORMER** operator has requested a release of liability from their bond on: N/A

The Division sent response by letter on: N/A

LEASE INTEREST OWNER NOTIFICATION:

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: N/A

COMMENTS:

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-34904
Well Name: BAYLESS STATE 2-2
Location: NATURAL BUTTES
Company Permit Issued to: WESTPORT OIL & GAS COMPANY, L.P.
Date Original Permit Issued: 3/5/2003

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☒

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐


Signature

2/11/2004
Date

Title: SR ADMINISTRATIVE ASSISTANT

Representing: WESTPORT OIL & GAS COMPANY, L.P.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

CONFIDENTIAL

SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells. Use APPLICATION FOR PERMIT -- for such proposals		6. Lease Designation and Serial Number ML-47044
		7. Indian Allottee or Tribe Name UTE
		8. Unit or Communitization Agreement
1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other (specify)		9. Well Name and Number BAYLES STATE 2-2
2. Name of Operator WESTPORT OIL & GAS COMPANY, L.P.		10. API Well Number 43-047-34904
3. Address of Operator 1368 SOUTH 1200 EAST, VERNAL, UTAH 84078	4. Telephone Number 435-781-7060	11. Field and Pool, or Wildcat NATURAL BUTTES
5. Location of Well Footage : 2460' FSL 1937' FEL County : UINTAH QQ, Sec, T., R., M : NWSE SEC 2-T9S-R20E State : UTAH		

12. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

NOTICE OF INTENT (Submit in Duplicate)	SUBSEQUENT REPORT (Submit Original Form Only)
<input type="checkbox"/> Abandonment <input type="checkbox"/> New Construction <input type="checkbox"/> Casing Repair <input type="checkbox"/> Pull or Alter Casing <input type="checkbox"/> Change of Plans <input type="checkbox"/> Recompletion <input type="checkbox"/> Conversion to Injection <input type="checkbox"/> Shoot or Acidize <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Vent or Flare <input type="checkbox"/> Multiple Completion <input type="checkbox"/> Water Shut-Off <input checked="" type="checkbox"/> Other <u>APD EXTENSION</u>	<input type="checkbox"/> Abandonment * <input type="checkbox"/> New Construction <input type="checkbox"/> Casing Repair <input type="checkbox"/> Pull or Alter Casing <input type="checkbox"/> Change of Plans <input type="checkbox"/> Shoot or Acidize <input type="checkbox"/> Conversion to Injection <input type="checkbox"/> Vent or Flare <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Water Shut-Off <input type="checkbox"/> Other _____
Approximate Date Work Will Start <u>WHEN APPROVED</u>	Date of Work Completion _____ Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION AND LOG form. * Must be accompanied by a cement verification report.

13. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

THE OPERATOR REQUESTS THAT THE APD BE EXTENDED FOR AN ADDITIONAL YEAR
SO THAT DRILLING OPERATIONS MAY BE COMPLETED.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 02-23-04
By: [Signature]

COPY SENT TO OPERATOR
Date: 02-26-04
Initials: CHO

RECEIVED

FEB 19 2004

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct.

Name & Signature DEBRA DOMENICI [Signature] Title SR ADMIN ASSIST Date 02/11/04

(State Use Only)

From: Diana Whitney
Subject: Re: FW: TD changes

Diana,

Please see the list below for the formation changes. If I need to send in new sundries, please let me know.

Debra

From: Laney, Brad
 Sent: Tuesday, May 10, 2005 1:44 PM
 To: Domenici, Debra
 Subject: RE: TD changes

Debra,

Hopefully the info listed below will help.

Brad

From: Domenici, Debra
 Sent: Tuesday, May 10, 2005 1:08 PM
 To: Laney, Brad
 Subject: FW: TD changes

Brad,

On the wells that we did TD changes, were any of them going to different zones?

formation(s)	New formations	Old
NBU 392	10550	Wasatch
Wasatch/MV		
STATE 921-32M	9700	Wasatch
Wasatch/MV		
BAYLESS STATE 2-3	10600	Wasatch
Wasatch/MV		
BAYLESS STATE 2-2	10600	Wasatch
Wasatch/MV		
NBU 442	9200	Wasatch/MV
Wasatch/MV		
CIGE 291	9100	
Wasatch/MV		Wasatch/MV
CIGE 285	9200	
Wasatch/MV		Wasatch/MV
NBU 921-22L	9760	
Wasatch/MV		Wasatch/MV
NBU 457	9750	Wasatch
Wasatch/MV		
GB 822-22D	10300	
Wasatch/MV		Wasatch/MV
NBU 278	9450	Wasatch/MV
Wasatch/MV		

Well name:

05-05 Westport bayless 2-2rev.Operator: **Westport Oil & Gas Company L.P.**

String type: Production

Project ID:

43-047-34872

Location: Uintah County

Design parameters:**Collapse**

Mud weight: 9.000 ppg

Design is based on evacuated pipe.

Minimum design factors:**Collapse:**

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No

Surface temperature: 65 °F

Bottom hole temperature: 213 °F

Temperature gradient: 1.40 °F/100ft

Minimum section length: 368 ft

Cement top: 1,691 ft

Burst

Max anticipated surface pressure:

0 psi

Internal gradient: 0.468 psi/ft

Calculated BHP 4,956 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)

8 Round LTC: 1.80 (J)

Buttress: 1.60 (J)

Premium: 1.50 (J)

Body yield: 1.50 (B)

Non-directional string.

Tension is based on air weight.

Neutral point: 9,174 ft

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	10600	4.5	11.60	N-80	LT&C	10600	10600	3.875	245.7
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	4956	6350	1.281	4956	7780	1.57	123	223	1.81 J

Prepared by: Dustin Doucet
Utah Div. of Oil & MiningPhone: 801-538-5281
FAX: 801-359-3940Date: June 29, 2005
Salt Lake City, Utah

ENGINEERING STIPULATIONS: Oil shale ,

Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Collapse is based on a vertical depth of 10600 ft, a mud weight of 9 ppg The casing is considered to be evacuated for collapse purposes.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

05-05 Westport rev.

Casing Schematic

Surface

9-5/8"
MW 8.3
Frac 19.3

TOC @
Surface
250. MD

TOC @
1916.

$$BHP = 4956 \text{ psi}$$

$$Gas/mud = (0.22)(10,600) = 2332 \text{ psi}$$

$$MASP = 2624 \text{ psi}$$

3mBOPF proposed ✓

✓ Adequate DND 6/29/05

4-1/2"
MW 9.

Production
10600. MD

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL ☐ GAS WELL ☒ OTHER ☐

2. NAME OF OPERATOR:
WESTPORT OIL & GAS COMPANY L.P.

3. ADDRESS OF OPERATOR:
1368 S. 1200 E. CITY VERNAL STATE UT ZIP 84078

PHONE NUMBER:
(435) 781-7024

4. LOCATION OF WELL

FOOTAGES AT SURFACE: 2460'FSL & 1937'FEL

COUNTY: UINTAH

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWSE 2 9S 20E

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: APD EXTENSION
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

THE OPERATOR REQUESTS AUTHORIZATION FOR AN ONE YEAR EXTENSION, SO THAT THE DRILLING OPERATIONS MAY BE COMPLETED.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 02-08-05

By: [Signature]

RECEIVED

FEB 0 / 2005

DIV. OF OIL, GAS & MINING

NAME (PLEASE PRINT) SHEILA UPCHEGO

TITLE REGULATORY ANALYST

SIGNATURE [Signature]

DATE 2/3/2005

(This space for State use only)

COPY SENT TO OPERATOR
Date: 2-9-05
Initials: [Signature]

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304734904
Well Name: BAYLESS STATE 2-2
Location: NWSE SECTION 2-T9S-R20E
Company Permit Issued to: WESTPORT OIL & GAS CO., L.P.
Date Original Permit Issued: 3/5/2003

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☒

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐


Signature

2/3/2005

Date

Title: REGULATORY ANALYST

Representing: WESTPORT OIL & GAS COMPANY L.P.

RECEIVED

FEB 0 / 2005

DIV. OF OIL, GAS & MINING

DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING		6. Lease Designation and Serial Number ML-47044
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, deepen existing wells, or to reenter plugged and abandoned wells. Use APPLICATION FOR PERMIT -- for such proposals		7. Indian Allottee or Tribe Name UTE
		8. Unit or Communitization Agreement
1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other (specify)		9. Well Name and Number BAYLESS STATE 2-2
2. Name of Operator WESTPORT OIL & GAS COMPANY, L.P.		10. API Well Number 43-047-34904
3. Address of Operator 1368 SOUTH 1200 EAST, VERNAL, UTAH 84078	4. Telephone Number (435)781-7060	11. Field and Pool, or Wildcat NATURAL BUTTES
5. Location of Well Footage : 2460' FSL 1937' FEL County : UINTAH QQ, Sec, T., R., M : NWSE SEC 2-T9S-R20E State : UTAH		
12. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		

NOTICE OF INTENT (Submit in Duplicate)		SUBSEQUENT REPORT (Submit Original Form Only)	
<input type="checkbox"/> Abandonment	<input type="checkbox"/> New Construction	<input type="checkbox"/> Abandonment *	<input type="checkbox"/> New Construction
<input type="checkbox"/> Casing Repair	<input type="checkbox"/> Pull or Alter Casing	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> Pull or Alter Casing
<input checked="" type="checkbox"/> Change of Plans	<input type="checkbox"/> Recompletion	<input type="checkbox"/> Change of Plans	<input type="checkbox"/> Shoot or Acidize
<input type="checkbox"/> Conversion to Injection	<input type="checkbox"/> Shoot or Acidize	<input type="checkbox"/> Conversion to Injection	<input type="checkbox"/> Vent or Flare
<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Vent or Flare	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Multiple Completion	<input type="checkbox"/> Water Shut-Off	<input type="checkbox"/> Other _____	
<input type="checkbox"/> Other _____			

Approximate Date Work Will Start _____ WHEN APPROVED

Date of Work Completion _____

Report results of Multiple Completions and Recompletions to different reservoirs on WELL COMPLETION OR RECOMPLETION AND LOG form.

* Must be accompanied by a cement verification report.

13. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

OPERATOR REQUESTS TO AMEND THE CURRENT DRILLING PROGRAM: TD CHANGE FROM 7950' TO 10,600'. THE CASING PROGRAM WILL STAY THE SAME. 4 1/2" production string will change from 11.6# J-55 to 11.6# I-80 per Lowell Young 6/29/05 DCD

COPY SENT TO OPERATOR
Date: 6-30-05
Initials: [Signature]

14. I hereby certify that the foregoing is true and correct.

Name & Signature DEBRA DOMENICI Debra Domenici Title ASSOC ENV ANALYST Date 05/05/05

(State Use Only)

APPROVED BY THE STATE
OF UTAH DIVISION OF
OIL, GAS, AND MINING

(8/90)

DATE: 6/29/05
BY: D. G. K. 24

See Instructions on Reverse Side

RECEIVED
MAY 10 2005

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER <u>CONFIDENTIAL</u>		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-47044
2. NAME OF OPERATOR: WESTPORT OIL & GAS COMPANY L.P.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE
3. ADDRESS OF OPERATOR: 1368 S. 1200 E. CITY VERNAL STATE UT ZIP 84078		7. UNIT or CA AGREEMENT NAME:
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2460'FSL & 1937'FEL		8. WELL NAME and NUMBER: BAYLESS STATE 2-2
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWSE 2 9S 20E		9. API NUMBER: 4304734904
COUNTY: UTAH		10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: DOGM APD EXTENSION
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

THE OPERATOR REQUESTS AUTHORIZATION FOR AN ONE YEAR EXTENSION FOR THE SUBJECT WELL LOCATION, SO THAT THE DRILLING OPERATIONS MAY BE COMPLETED. THE ORIGINAL APD WAS APPROVED BY THE DIVISION OF OIL, GAS AND MINING DEPARTMENT ON MARCH 5, 2003.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 02-13-06
By: *[Signature]*

COPY SENT TO OPERATOR
Date: 2-21-06
Initials: *[Signature]*

NAME (PLEASE PRINT) SHEILA UPCHEGO	TITLE REGULATORY ANALYST
SIGNATURE <i>[Signature]</i>	DATE 1/30/2006

(This space for State use only)

RECEIVED

FEB 03 2006

DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304734904
Well Name: BAYLESS STATE 2-2
Location: NWSE SECTION 2-T9S-R20E
Company Permit Issued to: WESTPORT OIL & GAS CO., L.P.
Date Original Permit Issued: 3/5/2003

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☒

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐


Signature

1/30/2006

Date

Title: REGULATORY ANALYST

Representing: WESTPORT OIL & GAS COMPANY L.P.

RECEIVED
FEB 03 2006

DIV. OF OIL, GAS & MINING



State of Utah

Department of Natural Resources

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas & Mining

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

March 28, 2006

Sheila Upchego
Westport Resources Corp.
1368 South 1200 East
Vernal UT 84078

Re: APD Rescinded -Bayless State 2-2 Sec. 2, T. 9S R. 20E
Uintah County, Utah API No. 43-047-34904

Dear Ms. Upchego:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on March 5, 2003. On February 23, 2004 and February 8, 2005, the Division granted a one-year APD extension. On February 13, 2006, the Division accidentally gave you an extra one-year APD extension that will need to be rescinded. Please see attached letter. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective March 28, 2006.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

Diana Whitney
Engineering Technician

cc: Well File
Bureau of Land Management, Vernal
SITLA, Ed Bonner